



PRICE LIST

Sauna Technology 2013



EXCELLENT KNOW-HOW FOR YOUR WELL-BEING

INCLUDING TANNING AND MASSAGE TECHNOLOGY




:: INNOVATIVE TECHNOLOGY AND MARKET-LEADING QUALITY.

KICK BACK AND RELAX.

Regardless of whether it is an icy cold winter's day or a mild summer's night - a bath in the sauna is always relaxing.

With a heater from the EOS basic series, it is easy to feel comfortable whether in a rustic sauna made of solid wood or in a modern-design element sauna. The basic range already offers a variety of Finnish or evaporator heaters that are available as upright or wall heaters, depending on the output variant. All our models are compact in construction, and therefore provide enough space for your individual cabin design. With an output of between 4.5 and 15 kW, they are ideally suited for saunas with a volume of between 4 and 25 m³. At EOS we make the outer casings of our heaters from powder-coated steel or chromium steel. Float mounted, they heat up quietly and thus ensure a particularly refreshing sauna bath. Heating elements and stone baskets are made from stainless steel to prevent excessive scale formation. The bases in the lower area of the fresh air intake are also used as drip pans. The excellent convection of the EOS heaters provides optimum air circulation in the cabin and thus creates a pleasant sauna climate. All sauna heaters from EOS are of course supplied with the special Olivin-Diabas sauna stones.

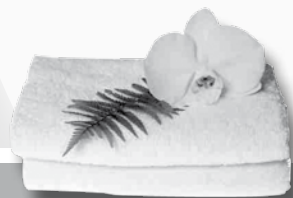

EOS CONTENTS

Finnish sauna heater	03
Sauna heaters with evaporators	09
Accessories for sauna heaters	12
FWA, additional evaporators, automatic fragrance units and automatic sauna infusion	13
Steam technology	16
Sauna control units	18
Sauna control unit accessories	20
Coloured light technology	23
Infrared technology	24
Infrared-/ tanning technology	27
Accessories for infrared-/ tanning technology	28
Sauna cabin accessories	29
Important notes/table of heating capacities and connection values	34
Notes	35
Heating technology	36

DR. KERN CONTENTS

Collagen units	38
Premium Line Solariums	40
Basic Line Solariums	43
Facial tanners	44
Accessories	45
Tanning & collagen lamps, starters/lamps	46
Radiation units	47
Massage	48
Important notes	50
Notes	51

valid from 1st January 2013

:: FINNISH SAUNA HEATER

Thermat (wall-mounted design)

Wall-mounted heater for family saunas. Stone accommodation grid made of stainless steel, cover frame made of aluminum die-casting. Height-adjustable stone rest. Connection box on the back.
15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.

Power	Art. No.	Price E excl. VAT
4.5 kW	94.4819	333.00
6.0 kW	94.4820	339.00
7.5 kW	94.4821	347.00
9.0 kW	94.4822	389.00

Connection 400 V 3N AC.
Installation dimensions: HWD 780 x 375 x 360 mm
Outer casing: Anthracite pearl effect

Mini (wall-mounted design)

Power	Art. No.	Price E excl. VAT
3.0 kW	94.2445	293.00

Connection 400 V 3N AC.
Installation dimensions: HWD 660 x 300 x 215 mm
Outer casing: stainless steel

Sauna heater for small saunas. Extremely compact and space-saving design. For Finnish sauna operation in small spaces for cabin sizes of 3 - 5 m³. Interior lining and outer casing made of stainless steel. Connection to 230 V N AC with separate 16 A fuse possible. 8 kg unit sauna stones included. 1.5 m silicone power cable 3 x 1.5² included.

Surcharge for additional packaging if dispatched individually 7.00 €.

43FN (upright design)

Recommended for family saunas. Interior lining made of aluminised steel. Connection box on the back. Stone accommodation grid made of stainless steel. Base as drip pan construction. 15 kg unit sauna stones included. Wall mount for suspended wall mounting included.

Surcharge for additional packaging if dispatched individually 9.00 €.

Power	Art. No.	Price E excl. VAT
6.0 kW	94.2234	413.00
7.5 kW	94.2235	435.00
9.0 kW	94.2236	465.00

Connection 400 V 3N AC.
Installation dimensions HWD: 710 x 420 x 360 mm.
Outer casing: Anthracite pearl effect

M3 (wall-mounted design)

Power	Art. No.	Price E excl. VAT
3.0 kW	94.1921	393.00

Connection 400 V 3N AC.
Installation dimensions: HWD 600 x 300 x 200 mm
Outer casing: stainless steel

Sauna heating unit for small saunas (3 - 5 m³) with a heating capacity requirement of up to 3 kW. Installed thermostatic control with a temperature control range from 40 °C to 110 °C. Triple casing construction made entirely of stainless steel. Operating unit can be located on the left or right-hand sides by exchanging the outer coating. Space-saving heater installation directly on the wall. Including 8 kg unit of sauna stones.

Surcharge for additional packaging if dispatched individually 7.00 €.

EURO (upright / wall-mounted design)

For family and hotel saunas. Triple casing technology with interior lining made of aluminised steel and stone basket as additional interior lining made of stainless steel. Cast iron cover. Connection box on the back. Floor plate designed as drip pan. Wall mount for suspended wall mounting included, legs available as an option. Outer casing made of polished stainless steel. 12 kW design made entirely of stainless steel. Especially designed and suitable for commercial use. 15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 9.00 €.

Power	Art. No.	Price E excl. VAT
7.5 kW	90.7686	594.00
9.0 kW	90.7687	622.00
10.5 kW	94.5185	636.00
12.0 kW	90.8076	652.00

Connection 400 V 3N AC.
Installation dimensions: HWD 800 x 460 x 350 mm
Outer casing: stainless steel

Legs for upright installation	
Art. No.	Price E excl. VAT
90.7110	62.00

RKS (wall-mounted design)

Power	Art. No.	Price E excl. VAT
6.0 kW	90.5511	415.00

Connection 400 V 3N AC.
Installation dimensions: HWD 780 x 470 x 250 mm
Outer casing: stainless steel

Recommended for family saunas. Installation on attached air duct. Space-saving installation depth. Interior lining made of aluminised steel. Cover with stone basket made of stove-enamelled steel plate. Outer casing made of polished stainless steel. Connection space at front inc. 1.2 m silicone power cable 5 x 1.5 mm². 15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.

CUBO (upright design)

Upright heater for family saunas. Service-friendly due to the modular design. Heating register replacement also possible without removing stones. Optimised ratio of radiation heat and convection through adapted stone quantity.
25 kg unit sauna stones included.

Power	Art. No.	Price E excl. VAT
7.5 kW	94.5073	860.00
9.0 kW	94.5074	880.00
12.0 kW	94.5075	940.00

Connection 400 V 3N AC.
Installation dimensions HWD: 750 x 400 x 425 mm.
Outer casing: Anthracite pearl effect

Filius (upright design)

Power	Art. No.	Price E excl. VAT
4.5 kW	94.5031	398.00
6.0 kW	94.5032	420.00
7.5 kW	94.5033	432.00

Connection 400 V 3N AC.
Installation dimensions HWD: 575 x 403 x 240 mm.
Outer casing: Anthracite pearl effect

Sauna heater for the compact private sauna. Extremely space-saving construction for Finnish sauna operation in the smallest of spaces through space-saving heater installation directly on the wall.
8 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.

:: FINNISH SAUNA HEATER

Fin-Tec (wall-mounted design)



Recommended for family saunas. Interior lining made of stainless steel. High quality, attractively shaped die-cast aluminium cover. Stone accommodation grid made of stainless steel. Height-adjustable stone rest. Connection box on the back. Floor plate designed as drip pan. For available accessories see Page 12. 15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.

Power	Art. No.	Price E excl. VAT
6.0 kW	94.3138	441.00
7.5 kW	94.3139	471.00
9.0 kW	94.3140	501.00

Connection 400 V 3N AC.
Einbaumaße HBT: 780 x 375 x 380 mm.
Outer casing: Anthracite pearl effect

P1 (upright design, Profi)

Power	Art. No.	Price E excl. VAT
10.5 kW	90.9120	895.00
12.0 kW	90.8775	931.00
15.0 kW	90.8776	1,076.00

Connection 400 V 3N AC.
Installation dimensions: HWD 725 x 630 x 375 mm
Outer casing: stainless steel

For hotel and commercial saunas. Interior lining and outer casing made entirely of stainless steel. Dual-circuit wiring. Connection box on the back. Base as drip pan construction. 2 x 15 kg unit sauna stones included.



Fin-Tec S (upright design)



Recommended for family saunas. Interior lining made of stainless steel. High quality, attractively shaped die-cast aluminium cover. Stone accommodation grid made of stainless steel. Height-adjustable stone rest. Connection box on the back. Floor plate designed as drip pan. For available accessories see Page 12. 15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.

Power	Art. No.	Price E excl. VAT
6.0 kW	94.4383	495.00
7.5 kW	94.4384	503.00
9.0 kW	94.4385	532.00

Connection 400 V 3N AC.
Installation dimensions: HWD 780 x 375 x 360 mm
Outer casing: Anthracite pearl effect

34.G (upright design, Profi)

Power	Art. No.	Price E excl. VAT
15.0 kW	90.8586	1,600.00
18.0 kW	90.8587	1,660.00
21.0 kW	90.8588	1,690.00
24.0 kW	90.8589	1,789.00
27.0 kW	90.8590	1,836.00
30.0 kW	90.8591	1,880.00
36.0 kW	90.8592	1,920.00

Stacking frame to increase the stone volume by an additional 30 kg.

Size	Art. No.	Price E excl. VAT
Size 1	94.4000	235.00
Size 2	94.4001	305.00

Stacking frames + mount for rocker switch when the stone basket is raised.

Size	Art. No.	Price E excl. VAT
Size 1	94.4983	460.00
Size 2	94.4984	510.00

Connection 400 V 3N AC.
Installation dimensions HWD: 950 x 750 x 530 mm (size 1).
Installation dimensions HWD: 950 x 1000 x 530 mm (size 2).
Outer casing: stainless steel

For commercial saunas. Triple casing construction in two sizes:
15 - 21 kW (Size 1) / 30 kg stones
24 - 36 kW (Size 2) / 45 kg stones
Interior lining and outer casing made entirely of stainless steel in lamellae design. Triple casing technology. Large stone basket made from stainless steel. Floor plate designed as drip pan. Dual-circuit wiring. Sauna stones included.



Euro-Max (upright / wall-mounted design)



Electric sauna heater for family and commercial saunas. For Finnish sauna operation. Cover made of die-cast aluminium, stone basket with its air intake opening is located above the heating elements. These may not come into contact with the sauna stones. Triple casing technology. Service-friendly due to the modular design. Optimised ratio of radiation heat and convection through adapted stone quantity. Including stone filling approx. 60 kg.

Power	Art. No.	Price E excl. VAT
9.0 kW	94.2320	1,044.00
12.0 kW	94.2321	1,075.00
15.0 kW	94.3882	1,170.00

Connection 400 V 3N AC.
Installation dimensions: HWD 900 x 500 x 500 mm
Outer casing: Anthracite pearl effect

Heater guard bracket for the assembly of a heater guard on sauna heaters		Price E excl. VAT
Art. No.		
94.4595		68.00

Goliath 34.G II (upright design, Profi)

Power	Art. No.	Price E excl. VAT
18.0 kW	94.4805	1,945.00
24.0 kW	94.4806	1,985.00
30.0 kW	94.4807	2,025.00
36.0 kW	94.4808	2,085.00

Heater guard bracket for the assembly of a heater guard onto the sauna heater (without wooden parts).

	Art. No.	Price E excl. VAT
	94.5067	152.00

Connection 400 V 3N AC.
Installation dimensions: HWD 825 x 960 x 470 mm
Outer casing: Anthracite pearl effect

Upright heater for commercial saunas. Triple casing technology and large stone basket with approx. 75 kg stone volume. Ideal radiation heat and convection through adapted stone quantity. 75 kg unit sauna stones included.



Germanius (upright design)



Upright heater for family, hotel and commercial saunas. Optimised ratio between heater and convection heat due to the large number of stones (60 kg) and the associated powerful sauna infusion. Service-friendly due to the modular design. Outer casing parts made of extruded aluminium profiles. Attractive design with the visual aspect of glowing heating elements in the viewing window in the lower heater area.


Power	Art. No.	Price E excl. VAT
12.0 kW	94.3931	1,886.00
15.0 kW	94.3932	1,927.00
18.0 kW	94.3933	2,019.00

Connection 400 V 3N AC.
Installation dimensions: HWD 918 x 618 x 510 mm
Outer casing: Anthracite pearl effect

Heater guard bracket for the assembly of a heater guard on sauna heaters		Price E excl. VAT
Art. No.		
94.4356		61.00

:: FINNISH SAUNA HEATER

Saunadome (upright design)

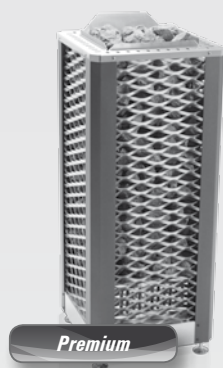

Upright heater for central placement in private and commercial saunas. Attractively shaped upright design with appealing wide web mesh. Large stone basket made from stainless steel with approx. 125 kg stones (sauna stones included).

Power	Art. No.	Price E excl. VAT
9.0 kW	94.4981	1,448.00
12.0 kW	94.4859	1,468.00
15.0 kW	94.4860	1,493.00
18.0 kW	94.4861	1,513.00
Heater guard bracket for the assembly of a heater guard onto the sauna heater (without wooden parts).		
	94.5323	220.00

Connection 400 V 3N AC.
Installation dimensions: HWD 1000 x 400 x 400 mm
Outer casing: Anthracite pearl effect

46.U Compact (upright design, rear wall heater)



Compact version of the 46.U with 10 kg stones. For family and small commercial sauna. Floor plate designed as drip pan. Stone basket with pouring bowl over the entire heater width. Pouring funnel with 1 m silicone extension hose and 6 m silicone power cable 5 x 1.5 mm². Includes air duct protection grill. 15 kg unit sauna stones included.

Power	Art. No.	Price E excl. VAT
7.5 kW	94.4250	995.00

Connection 400 V 3N AC.
Installation dimensions: HWD 870 x 920 x 200 mm
Outer casing: stainless steel

46.U (upright design, Profi rear wall heater)




For family, hotel and commercial saunas. Interior lining and outer casing made entirely of stainless steel. Floor plate designed as drip pan. Stone basket with pouring bowl over the entire heater width. Pouring funnel with 1 m silicone extension hose and 6 m silicone power cable 5 x 1.5 mm². Includes air duct protection grill. 15 kg unit sauna stones included.

Power	Art. No.	Price E excl. VAT
6.0 kW	94.4887	984.00
7.5 kW	94.4888	1,019.00
9.0 kW	94.4889	1,172.00
12.0 kW	90.8608	1,299.00

Connection 400 V 3N AC.
Installation dimensions: HWD 870 x 1120 x 200 mm
Outer casing: stainless steel

System differences visible heater / rear wall heater

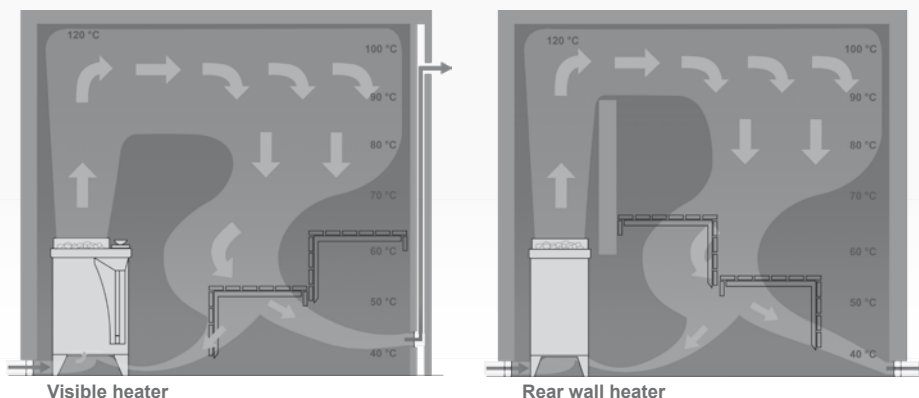

:: SAUNA HEATERS WITH EVAPORATORS

Note on sauna heaters with evaporators:

Our evaporator systems have been especially adapted for our sauna control units. Contact your water supply company and ask about the hardness level of your water. In hardness level I (0-8.4° German hardness level), the unit generally works without any problems and only has to be de-scaled as required. If your hardness level is in the range of II - II, the evaporator must be de-scaled from time to time (depending on the hardness level). Independent of this, all evaporator systems must be regularly cleaned or descaled. Please also observe that, according to the currently valid regulations (DIN EN 60335-1 / DIN EN 60335-2-53), during operation with humidity or evaporator systems the maximum permitted temperature must be in ratio to a defined air humidity; this is ensured through EOS sauna control units!

Bi-O Mini (wall-mounted design)

Power	Art. No.	Price E excl. VAT
3.0 kW	94.2444	517.00

Connection 400 V 3N AC.
Installation dimensions: HWD 660 x 300 x 215 mm
Outer casing: stainless steel

Combination sauna heater for small saunas. Extremely compact and space-saving design. For the Finnish sauna bath, humid-hot air bath, herbal steam bath and hot air bath in extremely small dimensions for cabin sizes of 3 - 5 m³. To be used with EOS evaporator control units. Outer casing and interior lining made of stainless steel. Evaporator integrated dry walkway and acoustic water deficiency alarm. Evaporator filling quantity approx. 2 litres. 8 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.



Bi-OThermat (wall-mounted design)

Power	Art. No.	Price E excl. VAT
6.0 kW	94.4823	723.00
7.5 kW	94.4824	773.00
9.0 kW	94.4825	825.00

Connection 400 V 3N AC.
Installation dimensions: HWD 760 x 450 x 380 mm
Outer casing: Anthracite pearl effect

Combination wall-mounted heater with evaporator located at side. Double-walled heater construction with interior lining and outer casing. Stone accommodation grid, cover frame and drip pan made entirely of polished stainless steel. Cover frame made of aluminum die-casting. Herb bowl on the cover grid. Evaporator integrated dry walkway and acoustic water deficiency alarm. To be used with EOS evaporator control units. Evaporator filling quantity approx. 5 litres. 15 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.



Bi-O Filius (wall-mounted design)

Power	Art. No.	Price E excl. VAT
4.5 kW	94.5144	750.00
6.0 kW	94.5145	770.00
7.5 kW	94.5146	815.00

Connection 400 V 3N AC.
Installation dimensions: HWD 575 x 470 x 240 mm
Outer casing: Anthracite pearl effect

Combination sauna heater for compact private saunas. For the Finnish sauna bath, humid-hot air bath, herbal steam bath and hot air bath in extremely small dimensions. To be used with EOS evaporator control units. Evaporator integrated dry walkway and acoustic water deficiency alarm. Evaporator filling quantity approx. 2.5 litres. 8 kg unit sauna stones included.

Surcharge for additional packaging if dispatched individually 7.00 €.



:: SAUNA HEATERS WITH EVAPORATORS

Bi-O Tec (wall-mounted design)



Combination wall heater with evaporator pouch laterally integrated into the heater. High quality, attractively shaped die-cast aluminium cover. Water pouch for approx. 5 l filling quantity. Interior lining made of stainless steel. Herb bowl to accommodate herbs, essential oils and essences. Evaporator integrated dry walkway and acoustic water deficiency alarm. 15 kg unit sauna stones included. To be used with EOS evaporator control units. For possible accessories see Page 12.

Surcharge for additional packaging if dispatched individually 7.00 €.

Power	Art. No.	Price E excl. VAT
6.0 kW *	94.2605A	790.00
7.5 kW **	94.2606A	836.00
9.0 kW **	94.2607A	861.00

Connection 400 V 3N AC.
Installation dimensions: HWD 780 x 450 x 380 mm
Outer casing: Anthracite pearl effect

Power	Art. No.	Price E excl. VAT
6.0 kW *	94.2608A	826.00
7.5 kW **	94.2609A	873.00
9.0 kW **	94.2610A	895.00

Connection 400 V 3N AC.
Installation dimensions: HWD 780 x 450 x 360 mm
Outer casing: stainless steel

Bi-O Max (upright design)



Combination upright heater with evaporator for family, hotel and commercial saunas. Optimised ratio between heater and convection heat due to the large number of stones (60 kg) and the associated powerful sauna infusion. For Finnish sauna operation and operation with evaporator. Cover and front panel made of die-cast aluminium, steam outlet under the herb bowl. Evaporator integrated dry walkway and acoustic water deficiency alarm. Stone basket with its air intake opening is located above the heating elements; these may not come into contact with the sauna stones. Service-friendly due to the modular design. To be used with EOS evaporator control units. Stone filling approx. 60 kg. See page 12 for accessories.

Power	Art. No.	Price E excl. VAT
9.0 kW	94.2317	1,487.00
12.0 kW	94.2318	1,508.00
15.0 kW	94.3922	1,636.00

Connection 400 V 3N AC.
Installation dimensions: HWD 900 x 500 x 500 mm
Outer casing: Anthracite pearl effect

Heater guard bracket for the assembly of a heater guard on sauna heaters		
Art. No.	Price E excl. VAT	
94.4595	68.00	

Bi-O Germanius (upright design)



Combination upright heater with evaporator for family, hotel and commercial saunas. Optimised ratio between heater and convection heat due to the large number of stones (60 kg) and the associated powerful sauna infusion. Service-friendly due to the modular design. Attractive visual aspect of glowing heating elements in the viewing window in the lower heater area. To be used with EOS evaporator control units. Including necessary fixed water connection. 18 kW version to be used with LSG 18.

* Evaporator power 1.5 kW
** Evaporator power 2.0 kW
*** Evaporator power 2.0 kW/ to be used with LSG 18.

Power	Art. No.	Price E excl. VAT
9.0 kW **	94.3926	2,415.00
12.0 kW **	94.3927	2,482.00
15.0 kW **	94.3928	2,515.00
18.0 kW ***	94.3929	2,555.00

Connection 400 V 3N AC.
Installation dimensions: HWD 918 x 618 x 510 mm
Outer casing: Anthracite pearl effect

Heater guard bracket for the assembly of a heater guard on sauna heaters		
Art. No.	Price E excl. VAT	
94.4356	61.00	

Bi-O Mat U (upright design, Profi)

Power	Art. No.	Price E excl. VAT
7.5 kW *	94.4891	1,699.00
9.0 kW *	94.4892	1,736.00
12.0 kW *	94.1127	1,764.00

Connection 400 V 3N AC.
Installation dimensions: HWD 1000 x 1120 x 200 mm
Outer casing: stainless steel

Combination rear wall heater with side-integrated evaporator pan. The evaporator is also available on the right side on request. Outer casing and interior lining made entirely of stainless steel. Floor plate designed as drip pan. Pouring funnel (evaporator) with 1 m silicone extension hose. Evaporator pan for max. 5 litres of water. Steam outlet located at side next to the sauna stones. Evaporator integrated dry walkway and acoustic water deficiency alarm. 6 m silicone electrical power cable 5 x 1.5 mm² for evaporator and heater pre-mounted on heater. To be used with EOS evaporator control units. Includes air duct protection grill. 15 kg unit sauna stones included.



Bi-O Star (upright design, Profi)

Power	Art. No.	Price E excl. VAT
15.0 kW **	94.2587	2,076.00
18.0 kW **	94.2588	2,158.00
21.0 kW ***	94.2589	2,635.00
24.0 kW ***	94.4079	2,669.00
30.0 kW ***	94.3037	2,808.00
Stacking frame to increase the stone volume by an additional 30 kg.		
Size 1	94.4000	235.00
Size 2	94.4001	305.00

Connection 400 V 3N AC.
Installation dimensions HWD: 950 x 750 x 530 mm (size 1).
Installation dimensions HWD: 950 x 1000 x 530 mm (size 2).
Outer casing: stainless steel

Combination upright heater with evaporator for commercial saunas. To be used with EOS evaporator control units. Triple casing construction in two sizes:
15-21 kW (Size 1) 30 kg stones included
24-30 kW (Size 2) 45 kg stones included
Interior lining and outer casing made entirely of stainless steel. Large stone basket made from stainless steel. Floor plate designed as drip pan. Dual-circuit wiring. Side integrated evaporator pocket for max. 5 litres water. Evaporator integrated dry walkway and acoustic water deficiency alarm.



Set millwheel sauna + 34.GM (upright design, Profi)

Power	Art. No.	Price E excl. VAT
18.0 kW	94.3076	2,272.00
27.0 kW	94.3092	2,443.00
30.0 kW	94.5149	2,493.00
36.0 kW	94.3093	2,598.00
Millwheel and control (required)		
	94.3077	7,796.00
Digital pouring display (optional)		
	94.4443	280.00
Remote control module for manual infusion (optional)		
	94.4087	104.00


Connection 400 V 3N AC.
Installation dimensions HWD: 950 x 750 x 530 mm (size 1).
Installation dimensions HWD: 950 x 1000 x 530 mm (size 2).
Outer casing: stainless steel

Set millwheel sauna heater + 34.GM (required)
Event sauna as infusion mill with 34.GM and control for the innovative event infusion (including FWA 01).
The mill sauna allows an automated event infusion at preselected intervals. The infusion takes place when the wheel turns clockwise. No infusion is undertaken when the wheel turns anti-clockwise.

For commercial saunas.
in two sizes:

18 kW -> 30 kg stones (Size 1)
27 - 36 kW -> 45 kg stones (Size 2)
2 x 15 kg or 3 x 15 kg sauna stones included.

* Evaporator power 1.5 kW
** Evaporator power 2.0 kW
*** Evaporator power 2 x 2.0 kW

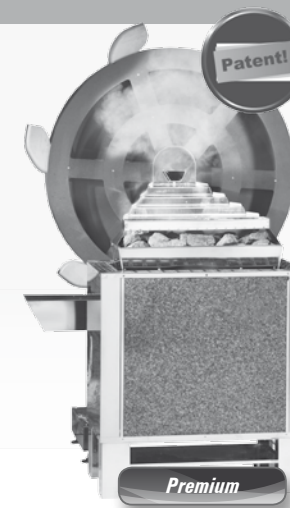

:: ACCESSORIES FOR SAUNA HEATERS

Mounting bracket and aroma bowl set



Innovative accessories for the different possibilities offered by a themed sauna.
Suitable for the sauna heaters Bi-O Max, Bi-O Tec, Fin-Tec and Euro-Max.
Set consists of 94.2502 & 94.2504

Art. No.	Price E excl. VAT
94.4884	173.00

Stainless steel

Mounting bracket and herbal pot set



Innovative accessories for the different possibilities offered by a themed sauna.
Suitable for the sauna heaters Bi-O Max, Bi-O Tec, Fin-Tec and Euro-Max.
Set consists of 94.2502 & 94.2503

Art. No.	Price E excl. VAT
94.4885	153.00

Stainless steel

Design mounting bracket with herbal pot



Innovative, curved mounting bracket as accessory to the different possibilities offered by a themed sauna. Suitable for: Germanius and Bi-O Germanius as well as for Bi-O Max, Bi-O Tec, Fin-Tec / FinTec-S and Euro-Max.

Art. No.	Price E excl. VAT
94.4221	158.00

Stainless steel

Residual water drip pan



Plastic drip pan for collecting residual water when draining evaporator heaters.

Art. No.	Price E excl. VAT
94.5425	10.00

Plastic

Cover guard



Safety cover for sauna heaters. Automatic switch-off for wall installation as an extended safety function under pressure influences. If the cover guard is pressed down by an object, the heating process is interrupted. Once the object has been removed, operation is continued. Heater installation set for installation on sauna heaters on request.

Type	Art. No.	Price E excl. VAT
1	94.4421	242.00
2	94.4424	252.00
3	94.4425	252.00
4	94.4724	272.00
5	94.4725	302.00

Stainless steel

Type 1 HWD
140 x 328 x 322 mm

Type 2 HWD
140 x 728 x 322 mm

Type 3 HWD
140 x 728 x 322 mm

Type 4 HWD
140 x 328 x 482 mm

Type 5 HWD
140 x 728 x 482 mm

INNOVATIVE SAUNA TECHNOLOGY

:: FWA, ADDITIONAL EVAPORATOR & AUTOMATIC FRAGRANCE UNITS & SAUNA INFUSION

FWA 01 compact (Fixed water connection)

Art. No.	Price E excl. VAT
94.4845	259.00

Installation dimensions: HWD 180 x 150 x 75 mm
Stainless steel

Fixed water connection for subsequent mounting on heaters with evaporators for automatic filling of the evaporator from the water mains. Mounting of the fixed water connection at the rear. Connection via steel flexible hose. Hose connection: 1/2" thread. Fixed water connection in reduced construction size and with a float assembly made of PU foam.



Additional evaporator

Art. No.	Price E excl. VAT
94.4742	538.00

Connection 230 V N AC.
Installation dimensions: HWD 600 x 310 x 140 mm
Stainless steel

Can be regulated using the EOS evaporator control units. Space-saving; can also be retrofitted for available sauna systems. Filling and steam outlet via folding, removable herbal screen. Suitable for sauna cabins up to a volume of approx. 14 m³. Evaporator integrated dry walkway and acoustic water deficiency alarm. Water storage tank approx. 5 litres capacity. Outer casing and storage tank made entirely of stainless steel. Stainless steel herb bowl included. 3.5 m silicone power cable 5 x 1.5 mm² included, power 2.0 kW.



AromaTec (Automatic sauna infusion)

	Art. No.	Price E excl. VAT
1 fragrance	94.5188	1,474.00
Variant 2V 2 fragrances	94.5189	2,219.00
Variant 3V 3 fragrances	94.5190	2,662.00

Connection 230 V N AC.
Installation dimensions: HWD 440 x 410 x 200 mm
Weight approx. 5 kg.

The system can be controlled via the internal control system, a button or via an external timer. The cycle, quantity and intensity can be set using a rotary knob. Automatic infusion delay in heat-up mode. Includes 230 V/AC output to the infusion preview, adjustable lead time for infusion display. Dosing rate: Water 50-600 ml / Fragrance 0-9 ml
The line should be installed "downwards". The mounting plate must always be mounted higher than the infusion nozzle. Optional back-flow preventer 1/2" available on request.



Duft-Tec Solo (Fragrance dosing unit)

Art. No.	Price E excl. VAT
94.5261	485.00

Installation dimensions HWD: 120 x 80 x 90 mm.

Hose pump for dosing fragrances with intensity control. The dosing rate is set via the "pause time" between two dosing processes using a potentiometer on the casing. The dosing time is set inside the casing. Only operated when the steam generator is on. Dosing rate max. 3l/h, hose pump SA, dosing hose 3.2x1.6 V with hose holder on 4x1 mm and suction hose (PE 0.8 m). Casing H-120 x W-80 x D-90 mm; power adapter 230V with a cable or 1.5 m power cable for direct connection of the pump to the steam generator.



:: AUTOMATIC FRAGRANCE UNITS & AUTOMATIC SAUNA INFUSION

Duft-Tec Quattro W (4x fragrance dosing unit)

Dosage device for dosing four different fragrance concentrations, operation only with steam generator switched on. Dosing rate max. 3l/h, 4 hose pumps SA with dosing hoses 3.2x1.6 V with hose holders on 4x1 mm and suction hose (PE 0.8 m), control DS for pauses and dosing times, dosing pumps, 1 bracket for holding the control casing and for 4 canisters 2.5 l, 4 dosage set, consisting of 3 m dosing hose PTFE 4x1 and spring-loaded dosage valve VA 3/8" AG, sealing element made of ceramic and metal, hose connection 4 x 1mm; pre-mounted onto black PE carrier plate.



Art. No.	Price E excl. VAT
94.5262	2,295.00

Connection 230 V 50 Hz.
Dimensions HWD: 500 x 600 x 200 mm

Sol-Tec V2 (Brine production for steam cabins)

Dosing station for the atomisation of brine solution for steam cabins; dosing rate: 1.6 l/h at 5bar in continuous operation 1 solenoid diaphragm pump, spray nozzle made of stainless steel, control casing, 1 pc. Spray nozzle with panel and wall feedthrough, 5m dosing line PTFE 4x1, disinfection set, VA bracket for 5l brine container, pre-mounted onto black PE carrier plate Dimensions H400 x W500 x10mm; power consumption: 10 W, 1l sterilised brine solution (approx. 5%)



Art. No.	Price E excl. VAT
94.5265	2,168.00

Connection 230 V 50 Hz.
Dimensions HWD: 400 x 500 x 10 mm.

Duft-Tec Quattro T (4x fragrance dosing unit)

Dosing unit for the dosage of four different fragrance concentrates, 1 microprocessor control for 4 dosing pumps with 6 fragrance programs (8-20 minutes), 6 dosing quantities per fragrance (0-4 ml / dosing stroke), 5 LEDs for function monitoring, 4 hose pumps SA approx. 3 l/h with dosing hoses 3.2x1.6 V with hose holder 4x1 mm and suction hose (PE 0.8 m), dosing pumps, 1 bracket for holding the control casing and for 4 canisters 2.5 l.



Art. No.	Price E excl. VAT
94.5263	2,718.00

Connection 230 V 50 Hz.
Dimensions HWD: 500 x 600 x 200 mm

Accessories for Sol-Tec unit series (brine preparation units)

	Art. No.	Price E excl. VAT
Brine solution for Sol-Tec 6x1l (box) 6 pcs. Politainer brine (approx. 5%) of 1l each, incl. disinfection rod.	94.5273	122.00
Brine solution for Sol-Tec 6x5l (box) 6 pcs. Politainer brine (approx. 5%) of 5l each, incl. disinfection rod.	94.5274	311.00



Accessories for Duft-Tec unit series (fragrance dosing unit)



	Art. No.	Price E excl. VAT
Duft-Tec dosage set DD Dosage valve VA 3/8" - 4x1, 3m dosing hose PTFE 4x1	94.5267	70.00
Duft-Tec dosage valve Dosage valve VA 3/8" - 4x1	94.5268	53.00
Bracket for canister up to 10 l Material: PE black Dimensions HWD: 600x235x240 mm	94.5269	117.00
Steam intake LD V4A stainless steel mixer pipe with connections for supply air and steam.	94.5270	1000.00
Pushbutton plate 4 buttons (without lighting) 4-fragrance pushbutton plate for Duft-Tec Quattro T, incl. 5m cable	94.5271	367.00
Pushbutton plate 4 buttons (with lighting) 4-fragrance pushbutton plate for Duft-Tec Quattro T, incl. 5m cable	94.5109	515.00
Flush-mounted casing for 4 button pushbutton plate	94.5272	53.00

Sol-Tec SL (Brine production e.g. for sauna cabins and salt caves)

Dosing station for spraying the brine solution in dry rooms. Control casing with microprocessor control; hose pump with speed regulation for adjusting the dosing quantity, membrane piston compressor, disinfection set, VA bracket for 5l brine container, 2-fabric spray nozzle made of stainless steel with cover panel and wall feedthrough, empty switch, dosing rate: Up to 3.2 l/h (in continuous operation), pre-mounted onto black PE carrier plate; power consumption: 400 W, 5l sterilised brine solution (approx. 5%)



Art. No.	Price E excl. VAT
94.5264	4,486.00

Connection 230 V 50 Hz.
Dimensions HWD: 580 x 630 x 250 mm

:: STEAM TECHNOLOGY

Steam generator SteamTec Classic (basic version)



High-performance steam generator (IPX4) for commercial use. With integrated flush function (descale/flush/empty). Can be combined with the control units EMOTEC® HCS 9003 or EmoTouch using F2 humidity sensor for a humid-hot air bath.

Casing body made of plastic (ABS). Evaporator tank made entirely of stainless steel. Automatic water drainage through electric ball valve. Container for descaling agent (without medium) included.

Power	Art. No.	Price E excl. VAT
4.5 kW	94.4367	2,830.00
6.0 kW	94.4368	3,145.00
9.0 kW	94.4369	3,460.00
12.0 kW	94.4556	4,100.00
15.0 kW	94.4557	4,250.00
18.0 kW	94.4558	4,400.00

Connection 400 V 3N AC.
Dimensions 4.5-9.0 kW HWD 600 x 320 x 330 mm
Dimensions 12-18 kW HWD 650 x 390 x 380 mm
Weight approx. 20 kg.
Weight when ready for operation 24 kg.

Steam nozzle/temperature sensor

	Art. No.	Price E excl. VAT
Steam jet	2001.4403	138.00
Temp. sensor	2001.4405	74.00

Steam nozzle for the SteamTec steam generator series. 1 1/4 inch with seal.

Temperature sensor for the EOS SteamTec steam generator



Supply air fan (with check valve)

Art. No.	Price E excl. VAT
2001.4401	320.00

Connection 220-240V 50Hz.

Fresh air ventilator DIN 100 (80W T50), check valve and 5-step speed regulator.



Steam generator SteamTec Premium (set version)



High-performance steam generator (IPX4) for commercial steam cabins. With multifunctional control for: Temperature, time, fragrance, RGB/LED coloured light changer, halogen cabin lighting, supply air and exhaust air as well as an automatic flush function (descale/flush/empty). The control (steam resistance) can either be flush-mounted in the casing or mounted in the steam cabin. Casing body made of plastic (ABS). Evaporator tank made entirely of stainless steel.

Set consists of:
Steam generator, multifunctional control, steam nozzle 1 1/4 inch m seal and hood
Fragrance pump (without fragrance) included.
Container for descaling agent (without medium) included. Temperature sensor NTC 1000 Ohm / 25° temp

Power	Art. No.	Price E excl. VAT
4.5 kW	94.4370	3,503.00
6.0 kW	94.4371	3,822.00
9.0 kW	94.4372	4,133.00
12.0 kW	94.4559	4,773.00
15.0 kW	94.4560	4,923.00
18.0 kW	94.4561	5,073.00

Connection 400 V 3N AC.
Dimensions 4.5-9.0 kW HWD 600 x 320 x 330 mm
Dimensions 12-18 kW HWD 650 x 390 x 380 mm
Weight approx. 20 kg.
Weight when ready for operation 24 kg.

Power	Steam/hour	For cabin volumes (steam bath)
4.5 kW	6 kg/hour	2.5 - 4.0 m³
6.0 kW	8 kg/hour	3.0 - 5.0 m³
9.0 kW	12 kg/hour	5.5 - 10.0 m³
12.0 kW	16 kg/hour	9.5 - 12.0 m³
15.0 kW	20 kg/hour	11.5 - 15.0 m³
18.0 kW	24 kg/hour	14.5 - 18.0 m³

Exhaust fan / poppet valve for exhaust fan

	Art. No.	Price E excl. VAT
Exhaust fan	2001.4402	150.00
Poppet valve	2001.4404	70.00

Exhaust air fan DN 100 (12.5 - 15W)
230V 50 Hz.
Poppet valve for exhaust air fan



Light / RGB light technology

	Art. No.	Price E excl. VAT
Light	94.4897	57.00
RGB light	94.4896	162.00

Halogen downlight: Installation downlight IP65 with 35 W MR16/6x5.3 12V illuminant.

RGB coloured light: Installation downlight IP65 with 35 W MR16/6x5.3 12V with RGB illuminant MR 16/6x5.3, 6 pole for coloured lighting RED, GREEN, BLUE



Steam bath door


	Art. No.	Price E excl. VAT
Door opening left Type 1	94.5029	950.00
Door opening right Type 1	94.5030	950.00
Door opening left Type 2	94.5079	750.00
Door opening right Type 2	94.5080	750.00

Steam bath door made of 8mm light grey tinted safety glass, polished with bevelled edges. Including door bands, silicone seal and door handles in stainless steel look and aluminium door frames.

Type 1:
Outer dimensions HWD 1990 x 790 x 50 mm
Passage dimensions HW 1950 x 710 mm
Type 2:
Outer dimensions HWD 1990 x 690 x 50 mm
Passage dimensions HW 1950 x 610 mm



Special descaler



Special descaler for the steam generator series SteamTec. In 5 litre canister.

Art. No.	Price E excl. VAT
2001.4604	100.00

Light / RGB light technology Starter set

Art. No.	Price E excl. VAT
Set	
94.5266	1,660.00
Individual	
94.5164	536.00

LED-RGB illumination starter set, consisting of:
- 1 control unit SAU RGB, in casing with 7 m extension to the 1st lamp and terminal plug, control for 15 light scenarios via encoder, 30 V 42 VA transformer, supply line with 230 VAC plug + 6 x LED-RGB installation lamp IP 65 VA chrome-plated, 1 Watt, matt lens, cover with 60 mm outer diameter, including mains cable 20 cm JST + 6 x installation sleeves (20973/945103) for LED lamp 3 x 1 W, mounting drill hole 42 mm, mounting sleeve D42 x 110 mm + nut, total length 113mm + 5 x extension cables (20748/945108) 2.5 m for LED illuminant, with plug and JST 4-pole coupling.



:: SAUNA CONTROL UNITS

ECON D1 (Sauna control unit, Finnish)

Electronic control unit with 24hr real time clock. Control range between 30 °C and 115 °C. Heating time limitation in the short time mode and 6h. Switching capacity 9 kW. Digital display of time, temperature and remaining time. Evaporator capacity up to 3 kW. Including button lock/child safety function. Temperature sensor and sensor cable (2.0 m) included in scope of delivery. Safety temperature limiter 139 °C.

Art. No.	Price E excl. VAT
94.5202	226.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD 220 x 250 x 60 mm
(Casing can also be partially installed as option)
Colour cream-white.

EMOTEC® DC 9000 (Sauna control unit, Finnish)

Art. No.	Price E excl. VAT
94.4674	325.00
Bench sensor*	
94.4389	76.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD: 240 x 230 x 70 mm.
Colour cream-white.

Electronic control unit with jumbo LCD display. Time and pre-selection timer in 24 hr real time. Continuous electronic control between 30 °C and 100 °C. Limitation of heating time 6 hrs/ 12 hrs, or no limitation of heating time. Connection for dimmable cabin light and fan. Switching capacity 9 kW, extendable with LSG. Including weekly timer function. Colored light module and bench sensor optional. Temperature sensor and sensor cable (2.0 m) included. Optional, floating input for construction-side remote start button available.



*2nd sensor (bench sensor) can be installed from version: 94.3884A-01

ECON H1 (Sauna control unit, Bi-O)

Electronic control unit with 24hr real time clock. For saunas and saunas with humidity operation. Control range between 30 °C - 70 °C and 40 °C -115 °C. 5-stage humidity cycling with water deficiency detection, reheat and fan functions. Heating time limitation in the short time mode and 6h. Switching capacity 9 kW. Digital display of time, temperature, humidity and remaining time. Evaporator capacity up to 3 kW. Including button lock/child safety function. Temperature sensor and sensor cable (2.0 m) included in scope of delivery. Safety temperature limiter 139 °C.

Art. No.	Price E excl. VAT
94.5203	326.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD 220 x 250 x 60 mm
(Casing can also be partially installed as option)
Colour cream-white.

EMOTEC® HCS 9003 (Sauna control unit, Bi-O)

Art. No.	Price E excl. VAT
94.4675	475.00
Humidity sensor	
90.9479	164.00
Bench sensor*	
94.4389	76.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD: 240 x 230 x 70 mm.
Colour cream-white.

Electronic control unit for saunas and saunas with humidity operation. Continuous control 30 °C - 70 °C in humidity operation, 30 °C-110 °C in sauna operation. Humidity cycle preselection, humidity sensor and bench sensor optional. Including weekly timer function. Heating time limitation 6 h/ 12 h or no heating time limitation. Reheat function. Connection possibility for fan, coloured light module and bench sensor optional. Coloured light module and bench sensor optional. Time and preselection timer in 24 hr real time. Switching capacity 9 kW, extendable with LSG. Evaporator capacity 3 kW. Safety temperature limiter 139 °C. Optional, floating input for construction-side remote start button available.



*2nd sensor (bench sensor) can be installed from version: 94.3884A-01

ECON D2 (Sauna control unit, Finnish)

Electronic control unit with 24h real time clock and preselection timer. Control range between 30 °C and 115 °C. Heating time limitation in temporary mode, 6h, can be extended to 12 h. Switching capacity 9 kW, can be extended with LSG. Digital display of time, pre-set time, temperature and remaining time. Including button lock/child safety function. Temperature sensor and sensor cable (2.0 m) included in delivery. Safety temperature limiter 139 °C.

Art. No.	Price E excl. VAT
94.5204	253.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD 220 x 250 x 60 mm
(Casing can also be partially installed as option)
Colour cream-white.

Installation/add-on variant EMOTEC®

	Art. No.	Price E excl. VAT
EMOTEC DC 9000 DLF (Finnish)	94.4639	392.00
EMOTEC HCS 9003 DLF (Bi-O)	94.4640	527.00
Blind frame for add-on installation available as an option.)	94.4718	84.00
10 m data cable (3.6 m included in scope of delivery).	2001.4660	144.00



ECON H2 (Sauna control unit, Bi-O)

Electronic control unit with 24h real time clock and preselection timer. For saunas and saunas with humidity operation. Control range between 30 °C - 70 °C and 40 °C -115 °C. Temperature preselection, 5-stage humidity cycling with water deficiency detection, reheat and fan functions. Heating time limitation in temporary mode, 6h, can be extended to 12 h. Switching capacity 9 kW, can be extended with LSG. Digital display of time, pre-set time, temperature, humidity and remaining time. Evaporator capacity up to 3 kW. Including button lock/child safety function. Temperature sensor and sensor cable (2.0 m) included in scope of delivery. Safety temperature limiter 139 °C.

Art. No.	Price E excl. VAT
94.5205	388.00

Connection 400 V 3N AC 50 Hz.
Dimensions HWD 220 x 250 x 60 mm
(Casing can also be partially installed as option)
Colour cream-white.

EmoTouch II (Touchscreen sauna control unit, Bi-O)

Art. No.	Price E excl. VAT
Add-on variant in EMOTEC Design	
94.4642	1,150.00
Installation variant aluminium frame	
94.4643	1,211.00
F2 humidity sensor	
90.9479	164.00
Bench sensor	
94.4389	76.00
Data cable 5 m	
94.4521	69.00
Data cable 15 m	
94.4522	94.00
Stacking frame for AF variant (optional)	
94.4882	80.00
Sound module for MP3 player connection	
94.4833	296.00

Electronic control unit with touchscreen and intuitive user interface for saunas and for saunas with humidity operation. Continuous control: 30 °C - 70 °C in humidity operation, 30 °C - 110 °C in sauna operation. Humidity cycle preselection, humidity sensor optional. Heating time limitation 6 h/ 12 h or without reheat function. Connection possibility for fan, coloured light module and bench sensor optional. Time & preselection timer in 24 hr real time. Includes week timer function and 8 user profiles for individual settings. Switching capacity 9 kW, extendable with power switchgear. Evaporator power 3 kW. Safety temperature limiter 139 °C. 2 m data cable as well as temperature sensor and sensor cable (2.0 m) including connection 400V 3N AC 50Hz. Optional, floating input for construction-side remote start button available

Installation variant Aluminium frame




Add-on variant in EMOTEC design



Add-on variant dimensions HWD: 170 x 175 x 40 mm.
Installation variant dimensions HWD: 150 x 200 x 40 mm
Colour cream-white.

:: ACCESSORY SAUNA control units

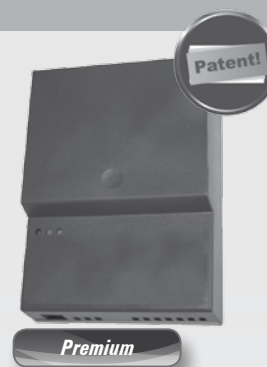

S-Guard (temperature monitoring unit)

Sauna heater safety monitoring for the avoidance of sauna fires. Safety calibration procedure for the individual determination of your sauna cabin's temperature curve. Once installation has taken place, the temperature behaviour in the heat-up phase is measured and the cabin is individually calibrated.

If the sauna heater is now for example covered up with a towel, the heat-up procedure alters significantly and the safety device switches the heater off while it is still in the heat-up phase.

Art. No.	Price E excl. VAT
94.5256	750.00

It is become common to start both commercial and private sauna heaters using remote start. Yet what happens if the sauna heater is remote started and a forgotten object is left lying on the heater? How can we most efficiently avoid existing fire risks?

We have studied these questions intensively and can now present - the S-Guard, innovative safety electronics consisting of a connection unit and two temperature sensors. The S-Guard functions extremely reliably and is able to detect a possible risk of fire in the heat-up phase.

Function and equipment

The patented S-Guard solution is mounted outside the sauna, for example in the technology room, and electronically connected with the two temperature sensors in the cabin. During commissioning of the sauna, the S-Guard already saved the temperature during the heat-up operation as a reference curve. Here the two temperature sensors PT1000 are located directly over the sauna heater. If the heater is then later switched on via remote control, the heat-up curve is continually compared with the saved reference curve. If the values of both curves deviate from each other even to a minor extent, because for example an object such as a towel has been left on the heater, the sauna heater is automatically switched off within a few seconds. This prevents a fire from starting.

The innovative S-Guard is the first tool of its kind on the market and is a welcome additional for all sauna bathers. It increases protection against fire substantially not only for commercial sauna systems, where such as safety device is legally stipulated (EN standard) in connection with remote control, for example from the technology room or reception, but also for private saunas. The new S-Guard provides top class safety and reliability.

S-Guard has a status display with three LEDs; the voltage supply totals 230V AC. The new S-Guard is VDE-certified and is product acc. DIN EN 60335-1.

EMOTEC® LSG 09 LSG 09 R (Power switchgear)

	Art. No.	Price E excl. VAT
LSG 09	94.3900A	184.00
EMOTEC LSG 09 R	94.4998	184.00

Dimensions HWD: 240 x 230 x 70 mm.
Colour cream-white

LSG 09 Switching capacity 9 kW, in connection with a control unit (9kW) maximum switching capacity 18 kW. Casing design as for EMOTEC control units.

EMOTEC LSG 09 R / Relay (Relay variant)
Power switchgear as LSG but with quieter switching processes due to relay.



LSG 18/18 H 36/36 H (Power switchgear)

	Art. No.	Price E excl. VAT
LSG 18	94.4391*	501.00
LSG 18 H	94.4231*	669.00
LSG 36	94.4392*	752.00
LSG 36 H	94.4230*	802.00

LSG 18: Switching capacity 18 kW, in connection with a control unit (9kW) maximum switching capacity 27 kW.
LSG 18 H: for additional evaporator power up to 4 kW.

LSG 36: Switching capacity 36 kW for dual circuit heater connection planned.
LSG 36 H: for additional evaporator power up to 4 kW.



* Fuse inserts must be planned construction-side.

F2 (humidity sensor)

Colour	Art. No.	Price E excl. VAT
Beige	90.9479	164.00
Anthracite	94.5027	164.00

Dimensions 45 mm x Ø 45 mm.

Humidity sensor inc. sensor casing and 4 m silicone cable for better regulation of the relative air humidity in connection with the control units EMOTEC® HCS 9003 and EmoTouch.




Bench sensor (2nd temperature sensor)

Colour	Art. No.	Price E excl. VAT
Beige	94.4389	76.00
Anthracite	94.5026	76.00

Dimensions 45 mm x Ø 45 mm.

Bench sensor inc. sensor casing and 6 m silicone cable for more precise regulation of the bathing temperature in connection with the control units EMOTEC® DC 9000 / HCS 9003 and EmoTouch.



Heater sensor (replacement sensor)

Art. No.	Price E excl. VAT
94.4389	59.00

Dimensions 45 mm x Ø 45 mm.

Replacement heater sensor incl. safety temperature limiter, sensor housing for regulation of the temperature in combination with an EOS control unit.
In delivery condition, each EOS sauna control unit is equipped with a heater sensor.



:: ACCESSORY SAUNA CONTROL UNITS

Remote start



For EMOTEC DC 9000, EMOTEC HCS 9003 and Emo-Touch II. Wired remote control button with operating mode display.

Necessary accessories:

Connection cable remote start 10 m

Connection cable remote start 25 m

Connection cable remote start 50 m

When using a remote start device, a second safety device such as for example a calibration procedure or automatic switch-off are mandatory.

Art. No.	Price E excl. VAT
94.4645	118.00
Connection line 10 m	
94.4646	50.00
Connection line 25 m	
94.4648	75.00
Connection line 50 m	
94.4648	120.00

GSM "Mobile" remote start module



For EMOTEC and EmoTouch control units. Sauna remote control module for remote start via mobile radio. Reception of mobile radio is presumed. Sauna can be turned on/off with a free call. Error message via alarm text message. SIM card not included in the scope of delivery.

When using a remote start device, a second safety device such as a calibration procedure or automatic switch-off are mandatory.

Art. No.	Price E excl. VAT
Remote start control for EMOTEC/EmoTouch	
94.4671	499.00
Remote start module for InfraTouch	
94.4905	499.00

Sauna loudspeaker



For EmoTouch II. Loudspeaker for the sauna cabin. Necessary for the EmoTouch II "sand timer" function. Can also be used for background music in the sauna cabin.

Art. No.	Price E excl. VAT
94.4649	154.00

Sauna loudspeaker



Built-in loudspeaker with 25W / 8 Ohm. Can also be used for background music in the sauna cabin using suitable audio devices.

Art. No.	Price E excl. VAT
94.5429	86.00

Phase angle control module for LED/spotlight



For EMOTEC and EmoTouch. Phase angle control module for combination with a suitable transformer or VSG. Switching power 100 W. Illuminants are not included in the scope of delivery.

Art. No.	Price E excl. VAT
94.4670	192.00


Switching module for energy saving lamps



For EMOTEC and EmoTouch. Module for sauna control unit. For combination with non-dimmable energy saving lamps. (Energy saving lamp not included in the scope of delivery.)

Art. No.	Price E excl. VAT
94.4669	104.00

Remote start for floating contact



Using the Remote start, the sauna unit can be switched on and off from a central point (by a pool attendant for example) by pressing for > 5 s a floating contact either already installed by the client or which can then be installed.

Art. No.	Price E excl. VAT
94.5275	110.00

:: COLOURED LIGHT TECHNOLOGY

FL 2000 K/ FL 2000 K FB/ FL 2001 K (coloured light unit)

Art. No.	Price E excl. VAT
FL 2000 K	
94.4233	632.00
EMOTEC/EmoTouch FL Module	
94.2761	164.00
FL 2000 K FB	
94.4316	710.00
FL 2001 K	
94.4289	765.00

FL 2000 K/ FL 2000 K FB: Weight 11.4 kg.
Outer dimensions LWD 740 x 300 x 90 mm
FL 2001 K: Weight 17.8 kg.
Outer dimensions LWD 1350 x 300 x 90 mm

FL 2000 K: For set-up and installation onto cabin ceilings or walls. Casing with wooden foldable frame. Safety glass pane. Coloured light and load unit separated with cable. Power cable 7 x 1 mm² incl. 4 fluorescent lamps (blue, green, yellow, red). Coloured light control modules or coloured light control units required.

FL 2000 K FB: Colour selection via remote control. Power 4 x 18 W 230 V/50 Hz.

FL 2001 K: Coloured light unit of the 2000 generation in larger construction. Power 4 x 36 W/230 V /50 Hz.



Colortec (coloured light control unit)

Art. No.	Price E excl. VAT
94.4883	235.00

Connection 230 V N AC/50 Hz.
Dimensions HWD: 140 x 195 x 50 mm.

Electronic coloured light control unit for flat installation in the cabin with LED display. For FL 2000 K or FL 2001 K coloured light.

Manual or automatic coloured light selection. Can be adjusted individually as individual or mixed colours in automatic operation from 1 - 10 minute periods. No dark phases. Power max. 450 W.



Emolux 1000 / 2000 / 2001 (Coloured light unit)

Art. No.	Price E excl. VAT
EMOLUX 1000	
94.5370	398.00
EMOLUX 2000	
94.5308	550.00
EMOLUX 2001	
94.5307	1,059.00
EMOLUX 2000-S	
94.5447	880.00
EMOLUX 2001-S	
94.5448	1,320.00
IR coloured light control made of wood for sauna	
2001.4951	152.00
EMOTEC coloured light control module	
94.4834	164.00
Colour control module InfraTouch	
2001.4754	164.00

Ready to plug in LED coloured light unit. With individual or mixed colours, automatic colour run in defined programs (e.g.: 1 or 4 minutes per colour or "sunrise"). Connection 230 V N AC/50 Hz. Including remote control.

EMOLUX 1000 for use in the IR cabin (Max. ambient temperature 100°C)
EMOLUX 2000 for use in the IR cabin (Max. ambient temperature 100°C)
EMOLUX 2001 for use in the IR cabin (Max. ambient temperature 100°C)

Emolux 2000-S for use in the sauna cabin
Emolux 2001-S for use in the sauna cabin

IR coloured light control made of wood for use in the sauna cabin

Coloured light control module for Emotec/EmoTouch
Coloured light control module for InfraTouch



:: INFRARED TECHNOLOGY

IRS 3 ceramic (infrared module)



Infrared module for IR thermal cabins. Installed 300 W special ceramic emitter with fired heating coil. Reflector made of high-gloss polished aluminium. Casing made of galvanised steel plate. Protective flock-coated cover grid. Completely pre-assembled with 3 m silicone connection cable 3 x 1.5 mm². Installation optional in a 90° corner or in the wall element.

Art. No.	Price E excl. VAT
94.1878	154.00

Connection 230 V N AC 300 W.
Weight: Approx. 2.5 kg. Dimensions HWD 530 x 185 x 75 mm (depth with cover grid).

IRS 35/IRS 50 spotlight RHK (infrared module)



Infrared module for infrared thermal cabins. Installed 350 W or 500 W magnesium oxide emitter. Protective flock-coated cover grid. Completely pre-assembled with 3 m silicone connection cable 3 x 1.5 mm². Installation optional in a 90° corner or in the wall element.

Art. No.	Price E excl. VAT
IRS3 350 W	
94.4305	134.00
IRS5 500 W	
94.4306	144.00

Connection 230 V N AC 50 Hz.
Weight: Approx. 2.5 kg. Dimensions HWD 870 x 185 x 65 mm (depth with cover grid).

IRS 4 RHK (infrared module)



Infrared module for infrared thermal cabins. Installed 400 W magnesium oxide emitter. Reflector made of high-gloss polished aluminium. Casing made of galvanised steel plate. Protective flock-coated cover grid. Completely pre-assembled with 3 m silicone connection cable 3 x 1.5 mm². Installation optional in a 90° corner or in the wall element.

Art. No.	Price E excl. VAT
94.2862	119.00
Plug included	
94.4012	111.00

Connection 230 V N AC 50 Hz.
Weight: Approx. 2 kg.
Dimensions HWD 530 x 185 x 65 mm.

InfraStar (infrared module)




Infrared module for infrared thermal cabins. Installed 400 W (2x 200W) or 600 W (2x 300 W) special ceramic emitter with fired heating coil. Completely pre-assembled with 3 m silicone connection cable 3 x 1.5 mm². Installation optional in a 90° corner or in the wall element. Installation depth in element 45 mm.

Art. No.	Price E excl. VAT
400 W	
94.5170	399.00
600 W	
94.5171	419.00

Connection 230 V N AC, weight approx. 2.7 kg.
Dimensions HWD 737 x 180 x 60 mm (depth with ceramic emitter)

Vitae 350/500/750 (infrared module)

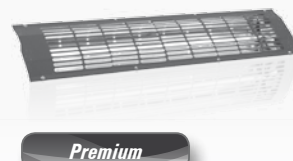

Infrared module for infrared thermal cabins. Built-in 350, 500 or 750 W Vitae-Emitter. Vitae 500 and 750 have an additional starter current limiter. Housing made from chromium steel. Protective flock-coated cover grid. Completely pre-assembled with 3 m silicone connection cable 3 x 1.5 mm². Installation optional in a 90° corner or in the wall element. Installation depth in element 50 mm.

Art. No.	Price E excl. VAT
350 W	
94.2865	273.00
500 W	
94.2576	280.00
750 W	
94.2577	301.00

Connection 230 V N AC, weight approx. 2.5 kg.
Dimensions HWD 870 x 185 x 65 mm (depth with cover grid)

Infrared heater accessories

Art. No.	Price E excl. VAT
94.4566	38.00

Corner facing for infrared heater.




IR heating foil

Art. No.	Price E excl. VAT
IRF 650 W	
94.3742	91.00
IRF 550 W	
94.3743	80.00
IRF 450 W	
94.3744	77.00
IRF 350 W	
94.3745	72.00
IRF 275 W	
94.3835	72.00
IRF 90 W	
94.3891	55.00

Connection 230 V N AC 50 Hz.
Heating foil available in sets of 10 on request.

Infrared heating foil for the sauna and for the infrared cabin. Free of heavy metals. With safety thermostat at 120 °C.

IRF 650 W
Foil dimensions: 1700 x 800 mm /
Heating surface dimensions: 1620 x 720 mm
IRF 550 W
Foil dimensions: 1450 x 800 mm /
Heating surface dimensions: 1370 x 720 mm
IRF 450 W
Foil dimensions: 1600 x 600 mm /
Heating surface dimensions: 1520 x 520 mm
IRF 350 W
Foil dimensions: 1250 x 600 mm /
Heating surface dimensions: 1170 x 520 mm
IRF 275 W
Foil dimensions: 1600 x 400 mm /
Heating surface dimensions: 1520 x 320 mm
IRF 90 W
Foil dimensions: 600 x 300 mm /
Heating surface dimensions: 520 x 220 mm

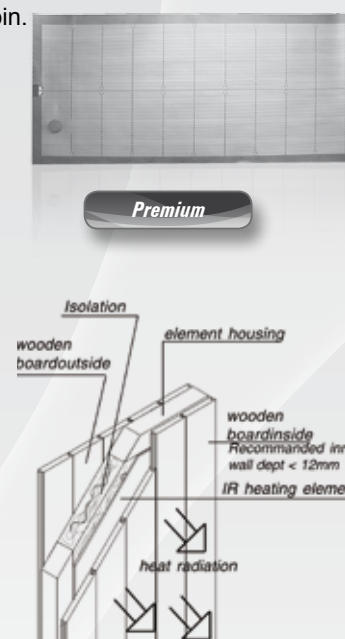

Dimmer unit (for infrared luminous heaters)

Art. No.	Price E excl. VAT
94.4954	91.00
IR plug-in module for 4 emitters	
94.4960	52.00
IR plug-in module for 6-9 emitters	
94.2046	63.00

Outer dimensions HWD 80 x 80 x 55 mm.
Wall cutout: 67 mm.
Colour: Wooden decoration

Dimmer unit for manual power adjustment of IT luminous heaters in the infrared cabin. Minimum distance to IR emitter 50 cm. Max. switching capacity 1 kW.

When using more than one IR emitter, we recommend the use of a suitable adaptor.
IR plug-in module for 4 emitters
IR plug-in module for 6-9 emitters



:: INFRARED TECHNOLOGY

Infratec Classic (infrared control unit)



Electronically controlled control unit for installation into the IR thermal cabin outer wall. Because of the installation into the wall element, the control unit is hardly visible from the outside. Control range 30 - 70 °C. Safety temperature limiter. Heating time settings 1 - 99 mins. Infratec with extension set: Completely preassembled with power cable with Schuko plug, 3-pole silicone line for cabin lighting and connection line for IR heater.
Max. switching capacity 3.5 kW (extendable).

Art. No.	Price E excl. VAT
Infratec without cable set, Temperature sensors included	
94.4388	189.00
Infratec upgrade kit with pre-mounted mains cable	
94.4334	219.00

Weight 1.4 kg.
Connection 230 V N AC 50 Hz.
Outer dimensions HWD 140 x 195 x 50 mm.

Infratec Premium (infrared control unit)



Electronically controlled control unit for installation or add-on in the cabin outer wall. Control range 30 - 70 °C. With optional foil sensors, the control can be carried out via the room or foil temperature. The control unit has 2 dimmable control circuits and an additional switching output e.g. for a calf heater and via the cabin lighting control.
Max. switching capacity 3.5 kW. (2 m data cable included)

Art. No.	Price E excl. VAT
94.5255	320.00
Foil sensor	
94.5260	76.00
15 m connection cable	
2001.5055	50.00

Weight of control unit 120 g.
Connection 230 V N AC 50 Hz.
Outer dimensions HWD 130 x 118 x 24 mm.

InfraTouch (infrared and sauna control unit)



Split, electronically controlled control unit for installation into the outer wall of the IR thermal cabin with touchscreen and intuitive user interface. Because of installation into the wall element, the control unit is hardly visible from the outside. Switching capacity 3.5kW (extendable).
Data cable 5 m included

Art. No.	Price E excl. VAT
94.4672	654.00
Stacking frame for add-on installation	
94.4855	103.00
15 m connection cable	
2001.4872	40.00
GSM "Mobile" remote start module	
94.4905	495.00

Weight of control unit 150 g.
Connection 230 V N AC 50 Hz.
Outer dimensions HWD 130 x 100 x 20 mm.

InfraTouch radio (infrared and sauna control unit)



Radio control unit for sauna and infrared cabins. Two-part, electronically controlled control unit with touchscreen and intuitive user interface.
Switching capacity 3.5kW (extendable).

Art. No.	Price E excl. VAT
94.4904	998.00

Weight of control unit 500 g.
Connection 230 V N AC 50 Hz.
Outer dimensions HWD 165 x 85 x 35 mm.

InfraSteam additional evaporator for the IR cabin



Extra evaporator for the IR cabin with integrated control unit. Filling and steam outlet via removable herbal screen. Water shortage monitoring including dry walkway and acoustic water deficiency alarm. Water storage tank approx. 2 litres capacity. Storage tank completely made of stainless steel. Mains cable (ready to plug in) included.

Art. No.	Price E excl. VAT
94.4140	446.00

Power 750 kW. Connection 230 V N AC
Outer dimensions HWD 570 x 230 x 110 mm.

:: INFRARED/TANNING TECHNOLOGY

IRelax (infrared unit)

Art. No.	Price E excl. VAT
Tripod variant 500 W	
94.4761	615.00
Tripod variant 750 W	
94.4762	715.00
Only tripod	
94.4843	150.00
Wall/ceiling variant 500 W	
94.5056	465.00
Wall/ceiling variant 750 W	
94.5057	564.00

Rotating and height-adjustable tripod IR heater. Mobile and flexible with the movable tripod. With mains switch and starter current limiter. Weight approx. tripod 11.9 kg /heater 5.6 kg Design 890 x 165 x 110 mm
Heated area approx. 1200 x 500 mm
Voltage 230 V N AC /50 Hz

IRelax without tripod but with wall and ceiling mount



InfraSky 3000 (IR ceiling heating unit)

Art. No.	Price E excl. VAT
RAL 9022 pearl light grey	
94.4307	3,197.00
RAL 9011 black	
94.4315	3,197.00

Power 3000 W/230 V N AC.
Fuse 1 x 16 A (K machine).

The IR ceiling unit with protective grid for private use and for professional, well-visited Wellness areas. Top performances with 6 x 500 W emitter, attractively shaped design, high quality, service-friendly. During fixed installation, a K automatic circuit breaker must be used. Thanks to the easy ceiling installation, the InfraSky provides sufficient space for your ideas and for pure relaxation. The generous unit space conveys a feeling of openness and freedom to the customer. Control unit (e.g. Skytec InfraSky) required.




Sunsky 400 / Sunsky 800 (ceiling solarium)

Art. No.	Price E excl. VAT
400 RAL 9022 pearl light grey	
95.3853	4,560.00
400 RAL 9011 black	
95.4135	4,560.00
Sunsky 800 RAL 9022 pearl light grey	
95.3812	5,160.00
Sunsky 800 RAL 9011 black	
95.4381	5,160.00


Sunsky 400: Power 2000 W/230 V N AC.
Fuse 1 x 16 A.
Sunsky 800: Power 3900 W/400 V 3N AC.
Fuse 3 x 16 A.

The sun sky for private use and for professional, well-visited Wellness areas. The generous tanning space conveys a feeling of openness and freedom to the customer. Gentle tanning through optimised lamp arrangement. 4 x 400 W (Sunsky 400) with blue filter. 4 x 800 W (Sunsky 800) with clear glass filter. Control unit (e.g. Suntec) required.



You can find optional accessories for Infrasky and Sunsky such as a matching rattan lounger, time control, mounting bracket or attractive decoration variants on the next page.

Minimum exhaust air quantity Sunsky 400: 520 m³/h
Minimum exhaust air quantity Sunsky 800: 955 m³/h

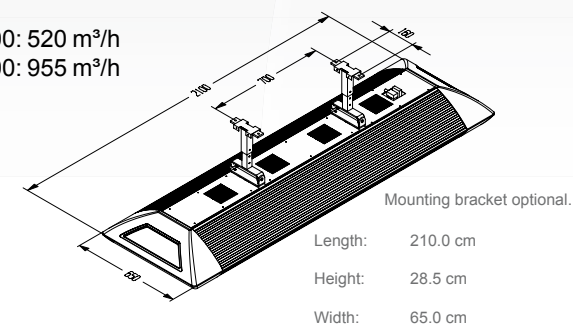

:: INFRARED AND TANNING TECHNOLOGY ACCESSORIES

Rattan lounger "RELAX" (Wellness lounger)



Dark brown lounger in refined rattan look with light fabric pads and adjustable head rest. Robust aluminium frame combined with high-quality plastic rattan.

Art. No.	Price E excl. VAT
2001.4265	320.00

Dimensions: LWH 2000 x 750 x 750-1000 mm

Time control Sunsky / InfraSky



SunTec:
External control, 30 or 60 minute timer

SkyTec:
External control, 30 or 60 minute timer

Art. No.	Price E excl. VAT
SunTec Sunsky	
95.3892	210.00
SkyTec InfraSky	
94.4340	210.00

Tan-Control time control



Multifunction solarium control unit. Including happy-hour function, lamp operating hours meter and lots more.

Art. No.	Price E excl. VAT
95.4787	140.00

Mounting bracket (Ceiling mount for Sunsky / Infrasky).



	Art. No.	Price E excl. VAT
200 ceiling clearance approx. 210 - 290 mm Silver RAL 9022	95.3923	335.00
400 ceiling clearance approx. 410 - 490 mm Silver RAL 9022	95.3924	335.00
600 ceiling clearance approx. 610 - 690 mm Silver RAL 9022	95.3925	335.00
200 ceiling clearance approx. 210 - 290 mm Black RAL 9011	95.4161	335.00
400 ceiling clearance approx. 410 - 490 mm Black RAL 9011	95.4162	335.00
600 ceiling clearance approx. 610 - 690 mm Black RAL 9011	95.4163	335.00

Lift system (ceiling lift InfraSky)



Ceiling mounted lift system with belt mechanism. Device is ready to be plugged in with 2.5 m mains cable and plug with earthing contact. Maximum belt length 2.1m. Maximum tensile force of 90 kg.

Art. No.	Price E excl. VAT
RAL 9011 black	
95.4577	1,100.00
RAL 9022 silver	
95.4576	1,100.00

Connection 230 V N AC/50 Hz.
Dimensions HWD 955 x 170 x 158 mm

:: SAUNA CABIN ACCESSORIES

Sauna steam and infusion stone

Art. No.	Price E excl. VAT
94.5239	18.50

Steam and infusion stone with 4 water funnels, water content approx. 60 ml: lay between the sauna stones for a mild, even infusion.



Multicup

Art. No.	Price E excl. VAT
94.2534	71.00
6-set Multicup	
94.3088	399.00
Multicup set with herbal screen	
94.5494	89.00

Using the Multicup it is possible to bring even more Nature and Wellness into your cabin. Can be used for example with Himalayan salt crystals, salt brines, dissolved herbs etc. Diameter 16 cm, filling quantity approx. 0.6 l. Delivery includes ca. 1 kg original Himalayan salt crystals.



Sauna infusion flower

Art. No.	Price E excl. VAT
94.5240	65.00

Ceramic pot: Ø 100 mm, height 80 mm, Weight approx. 400 g.

Sauna infusion flower with continuously adjustable drop valve for direct installation over the sauna heater. Vessel made of reddish, marbled ceramic, with colourless glazed interior, delivery incl. ceiling hooks and 1 m suspension chain made of stainless steel, contents max. 300 ml,



Original Himalayan salt crystals


	Art. No.	Price E excl. VAT
Special salt adhesive 1 kg unit	94.5510	30.00
Salt stones 1 kg unit e.g. for Multicup	94.2630	12.00
Set of 20 salt tiles, dimensions 200 x 100 x 25 mm	94.5433	92.00
Set of 20 salt tiles, dimensions 200 x 200 x 25 mm	94.5430	on request
Salt bricks 200 x 100 x 50 mm (tolerance 3 - 6 mm on each side), packing unit of 10 salt bricks (set of 10), 1 side broken	95.5432	52.00
Salt bricks 200 x 100 x 50 mm (tolerance 3 - 6 mm on each side), packing unit of 10 salt bricks (set of 10), 6 smooth cut sides	94.5426	42.00



Sauna robe

Size	Art. No.	Price E excl. VAT
S	94.4360	70.00
M	94.4361	70.00
L	94.4362	70.00
XL	94.4363	70.00
XXL	94.4364	70.00

Sauna robe in various sizes with pocket and belt. In high quality pure cotton. With woven sauna logo. Colour white. Material 100 % cotton. Washable at 60°C.



Sauna towel

Art. No.	Price E excl. VAT
94.4359	30.00

Sauna towel in high quality pure cotton. With woven sauna logo. Colour white. Material 100 % cotton. Washable at 40°C. Dimensions 70 x 200 cm. Quality: 450g/m².



:: SAUNA CABIN ACCESSORIES

Sauna lights



Lampshade, anti-glare, incl. spray water protected, heat resistance oval lamp (IP54) made of die-cast aluminium with glass shade and porcelain mount without illuminant. (T 150 °C).

Sauna lamp Basic with lampshade 205 x 270 mm

Art. No.	Price E excl. VAT
94.2877	32.00
Oval lamp without lampshade and illuminant.	
94.3749	17.00
Special light for sauna cabins 40 W	
94.5497	7.00

Bath control board

Made of PVC. Four colours, Size 210 x 297 mm.

Variant 1 "Tips for the ideal sauna bath"

Variant 2 "How to have a sauna bath correctly"



Art. No.	Price E excl. VAT
Variant 1	
94.4652	7.00
Variant 2	
90.875200	7.00

Thermometer/ Hygrometer



Sauna thermometer Ø 100 mm.

Measuring range 0 - 120 °C.

Sauna hygrometer Ø 100 mm.

Measuring range 0 - 100% relative air humidity.

Art. No.	Price E excl. VAT
Sauna thermometer	
90.5521	17.00
Sauna hygrometer	
90.5522	22.00

Climate meter

Sauna climate meter Ø 100 mm.

Combined thermometer and hygrometer.

Sauna measuring range in contrasting colour.

Sauna climate meter Ø 160 mm.

Combined thermometer and hygrometer.

Sauna measuring range in contrasting colour.



Art. No.	Price E excl. VAT
Ø 100 mm	
90.5523	24.00
Ø 160 mm	
90.6084	40.00

Climate measuring station with glass and wooden frame

Sauna thermometer + sauna hygrometer Ø 100 mm.

Thermometer measuring range 0 - 120 °C.

Hygrometer measuring range 0 - 100% relative air humidity. Dimensions 180 x 245 mm.



Art. No.	Price E excl. VAT
94.4118	48.00

Sand timer

Consisting of a pouring pail, pail insert, scoop, sand timer, climate meter Ø 100 mm and bathing control board. Packed in a carrying box.



Art. No.	Price E excl. VAT
90.5518	14.00

Sauna Set N I + II

6-piece: Consisting of a pouring pail, pail insert, scoop, sand timer, climate meter Ø 100 mm and bathing control board. Packed into a carrying box.

5-piece: Consisting of pouring pail, pail insert, scoop, sand timer, climate meter Ø 100 mm.

Packed into a carrying box.



Art. No.	Price E excl. VAT
6-piece set	
94.2863	88.00
5-piece set	
94.2864	83.00

:: SAUNA CABIN ACCESSORIES

Pouring pail

Art. No.	Price E excl. VAT
90.5520	37.00

Made of softwood, bound with two metal rings. With insert. Approx. 5 l capacity.



Pail insert

Art. No.	Price E excl. VAT
90.9088	7.00

Suitable for softwood pouring pails: Approx. 5 l capacity.



Scoop

Art. No.	Price E excl. VAT
90.5519	10.00


Made of wood. Length approx. 40 cm.



Sauna set, made of stainless steel (2-part)

Art. No.	Price E excl. VAT
94.4122	47.00

Consisting of pouring pail 4.5 l stainless steel with wooden handle, stainless steel scoop with wooden handle. Packed into a carrying box.



Sauna infusion accessories, copper

Art. No.	Price E excl. VAT
Infusion pail	
94.5241	84.00
Scoop	
94.5242	24.00

Pouring pail 4.0 l made of copper with wooden handle.

Scoop, approx. 44 cm length made of copper with wooden handle.



Sauna Set Transparent

Art. No.	Price E excl. VAT
94.5243	95.00

Pouring pail approx. 5.0 l made of transparent and up to 80°C permanently heat-resistant polycarbonate. Wooden handles made of thermally-treated aspen wood. (Scope of delivery does not include sauna towel)



Splash shower


Art. No.	Price E excl. VAT
Type 1	
94.5246	451.00
Type 2	
94.5245	490.00
Type 3	
94.5244	359.00

Splash shower with fixed water connection, water quantity 4.5 - 7.5 l with adjustable float valve.

Type 1 with holding bracket for wall / ceiling mounting

Type 2 with bearing arm for wall mounting


Type 3 with chain suspension on a ceiling hook



Foot pan

Art. No.	Price E excl. VAT
94.5247	93.00

Foot pan made of natural softwood with plastic insert, approx. 17 l content for private use with 2 collar iron hoops, Top dimensions: WxH 400x200 mm (with handle 300 mm)



:: SAUNA CABIN ACCESSORIES

Ergonomic backrest



Ergonomic backrest made of: Poplar wood
Dimensions HWD 520 x 400 x 70 mm

Art. No.	Price E excl. VAT
94.4121	46.00

Sauna bench - spring element



Spring element for installation in sauna, quiet zone and health loungers as well as in head, back and foot supports for comfortable lying and sitting through perfect adaptation to individual body and head shapes. Spring pressure approx. 80 Nm, individually adjustable.
Dimensions: HxW 105 x 20 mm, assembly plate 50 x 20 mm, weight 35 g, 10 pieces per package.

Art. No.	Price E excl. VAT
94.5248	125.00

Door band Modern Art



Glass door bands Modern Art, with screw-on band in the door rebate for private and commercial systems, notes: flush with the door frame, drill holes 1 x 20 mm, load capacity 20 kg/unit. Dimensions WHD: 70 x 105 x 21 mm, rebate depth on screw-on band: embedded 20 mm/mounted 17 mm, weight: 420 g, 1 adjustable eccentric, 1 cover cap, large, 1 mounting screw M8x20 stainless steel.

Art. No.	Price E excl. VAT
Brown DIN-Right/Left PU 1	
94.5251	28.50
Polished chromium DIN right/left PU 1	
94.5252	32.50

Door band tongue shape



Tongue shaped for private and commercial systems. Mounting into rebate: 2 drill-in threaded pins M8x40 DIN on left/right-hand sides for inside doors, drill holes 2 x 20 mm (dimension sheet on request), loading capacity 30 kg/unit. Dimensions WxHxD: 130x77x35 mm, weight: 540 g 1 adjustable eccentric, 2 mounting screws M8x20 Stainless steel, 2 cover caps, large/2 cover caps, small, 1 protective sleeve for glass hole, VPE 1

Art. No.	Price E excl. VAT
94.5253	46.00

Door band, self-closing, tongue shaped



Self-closing glass door bands - tongue shaped, with screw-on band in the door rebate for inside doors for private and commercial systems, drill holes 2 x 20 mm, load capacity 30 kg/unit, dimensions WHD: 130 x 125 x 35 mm. Rebate depth for screw-on band: embedded 23 mm/mounted 20 mm, weight: 720 g, 1 adjustment eccentric, 2 large cover caps, 2 mounting screws M8x20 made of stainless steel, 1 protective sleeve for glass hole, colour: matt chrome.

Art. No.	Price E excl. VAT
DIN left VPE 1	
94.5249	75.00
DIN right VPE 1	
94.5250	75.00

Door handle Premium




Premium door hand set for the sauna cabin.
Ideal combination made of wood and stainless steel.

Art. No.	Price E excl. VAT
94.5320	46.00

:: SAUNA CABIN ACCESSORIES

Adhesive plate/door magnet

	Art. No.	Price E excl. VAT
U-adhesive plate for glass door 6 mm	94.4120	2.50
U-adhesive plate for glass door 8 mm	94.4126	2.50
Door magnet 95 N	94.4124	7.50
Door magnet 150 N	94.4125	10.50



Sauna door Basic

Art. No.	Price E excl. VAT
Colour transparent	
94.4119	292.00
Colour bronze	
94.4127	380.00

Glass door 6 mm single-pane safety glass incl. door bands, seal, door knob, door magnet and wooden frame.
Colour clear or bronze.

Glass door dimensions B x H 625 x 1844 mm
Wooden frame dimensions W x H 715 x 1934 mm



Sauna door Premium

Art. No.	Price E excl. VAT
94.4128	472.00

Glass door 8 mm single pane safety glass incl. door bands, seal, door handle made of stainless steel and beech, door magnet and wooden frame. Colour transparent. Glass door dimensions W x H 625 x 1844 mm. Wooden frame dimensions W x H 715 x 1934 mm.



Silicone power cable

Cross-section in mm².	Length	Art. No.	Price E excl. VAT
3 x 1.5	2 m	94.3736	8.00
	5 m	94.3737	16.00
5 x 1.5	2 m	94.2440	13.00
	5 m	94.2872	32.00
5 x 2.5	2 m	94.2437	22.00
	5 m	94.2871	50.00
5 x 4	5 m	94.2870	71.00
	5 m	94.2869	105.00



Silicone power cable

	Colour	Length	Art. No.	Price E excl. VAT
Silicone sensor cable 2 x 0.5 mm²	Red	5 m	94.2866	8.00
	White	5 m	94.2867	8.00
Silicone sensor cable 3 x 0.5 mm² f. Humidity sensor F2	Red	5 m	94.2868	14.00



Sauna stones

Art. No.	Price E excl. VAT
94.4149	22.00

Special Olivin-Diabas natural sauna stones
Approx. 15 kg unit.
Packed in a box.



:: IMPORTANT NOTES

:: NOTES

	Outer dimensions HWD in mm	VDE	thermostatic temperature detection	electronic temperature detection	Heater start adjustable 0-24 hrs	Heating time maximum in hrs	Cabin lighting	Dimmability of cabin lighting	Display of day time / pre-selected time	Temperature range in sauna operation in °C	Temperature range in humidity operation in °C	7-segment digital display	LCD multifunction display (illuminated)	Fan switch	Continuous switching for fan operation	2-sensor system (optional)	Humidity sensor as option	Subsequent drying program	Data retention during power loss (up to 24 hrs)	Expansion of switching load to 18/27/36 kW with LSG	Coloured light optionally upgradable	for humidity operation	Maximum switching capacity in kW
EMOTEC® DC 9000	240 x 230 x 70	■		■	■	6/12/∞	■	■	■	30-110			■	■	■				■	■	■		9
EMOTEC® HCS 9003		■		■	■	6/12/∞	■	■	■	30-110	30-70		■	■	■		■	■	■	■	■	■	9
EmoTouch II	170 x 175 x 40	■		■	■	6/12/∞	■	■	■	30-110	30-70		■	■	■	■	■	■	■	■	■	■	9
InfraTouch	130 x 100 x 20	■		■	■	6/12/∞	■	■	■	70-110	30-80		■	■	■			■	■	■	■	■	3.3
Econ D1	220 x 250 x 60	■		■		6	■		■	40-115			■						■				9
Econ H1		■		■		6	■		■	40-115	30-70		■	■				■	■			■	9
Econ D2		■		■	■	6/12	■		■	40-115			■						■	■			9
Econ H2		■		■	■	6/12	■		■	40-115	30-70		■	■				■	■	■		■	9
Humidity sensor F2		■		Additionally to the control unit EMOTEC® HCS 9003																			
EMOTEC® L 09	240 x 230 x 70	■		Power switchgear: switching load in combination with control unit max. 18 kW																			9
45 L09	215 x 255 x 90	■		Power switchgear: switching load in combination with control unit max. 18 kW																			9
LSG 18	450 x 300 x 142	■		Power switchgear: switching load in combination with control unit max. 27 kW																			18
LSG 18 H		■		Power switchgear: same as LSG 18, however for evaporator power up to 4 kW																			18
LSG 36	450 x 300 x 142	■		Power switchgear: switch load 36 kW (without control unit)																			36
LSG 36 H		■		Power switchgear: same as LSG 36, however for evaporator power up to 4 kW																			36

Required heating capacity and connected load																	
Heating capacity in kW	Cabin size in m³														Minimum cross section of power cable in mm²		
	3-5	4-6	6-8	7-10	9-14	14-18	18-25	24-30	24-34	35-40	40-50	50-65	65-75	Connection to 400 V 3N AC	Connection to 230 V AC	Fuse A	
3.0	<div></div>														3 x 1.5²	1 x 16	
4.5		<div></div>												5 x 2.5²		3 x 16	
6.0			<div></div>														
7.5				<div></div>													
9.0					<div></div>												
12.0						<div></div>								5 x 4²		3 x 25	
15.0							<div></div>										
18.0								<div></div>						5 x 6²		3 x 35	
21.0									<div></div>								
24.0										<div></div>				5 x 10²		3 x 50	
27.0											<div></div>						
30.0												<div></div>		minimum 5 x 10²		3 x 63	
36.0												<div></div>					

:: HEATING TECHNOLOGY

Terra Vita II 0.3 m infrared heater, wall mounting




Infrared heater with immediate effect. Comforting warmth is radiated immediately after switching on this unit. Targeted and particularly short-wave IR heat radiation, meaning highly-efficient and complete use of the heater's heating effect. Attractively shaped casing design with intelligent cooling function, optimum insulation and flexible mounting possibilities. On/off switch on casing, starting current limitation.

Art. No.	Price E excl. VAT
RAL 9022 Pearl light grey	
94.4571	283.00
RAL 9022 + anthracite pearl effect side parts	
94.4782	283.00

With 0.3 m mains cable
Power 2000 W, 230 V, N AC.

Terra Vita II 2.3 m infrared heater, wall mounting

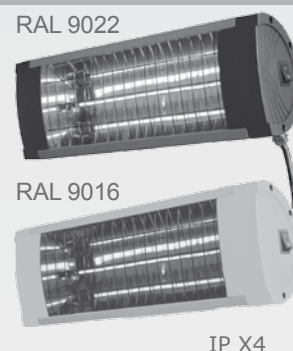

Infrared heater with immediate effect. Comforting warmth is radiated immediately after switching on this unit. Targeted and particularly short-wave IR heat radiation, meaning highly-efficient and complete use of the heater's heating effect. Attractively shaped casing design with intelligent cooling function, optimum insulation and flexible mounting possibilities. On/off switch on casing, starting current limitation.

Art. No.	Price E excl. VAT
RAL 9022 Pearl light grey	
94.4572	303.00
RAL 9016 White	
94.4842	303.00
RAL 9022 + anthracite pearl effect side parts	
94.4783	303.00

With 2.3 m mains cable
Power 2000 W, 230 V, N AC.

Terra Vita II accessories



Tripod for Terra Vita II, stable and for universal use, easy and safe handling, height adjustment possible between 160 and 260 cm
Clamping holder for Terra Vita II (RAL 9022 Pearl light grey)
2x tripod holder for Terra Vita II (RAL 9022 Pearl light grey, without tripod)

Art. No.	Price E excl. VAT
94.4763	50.00
Clamping holder	
94.4971	28.00
2x tripod holder	
94.4970	34.00

Set: Terra Vita II 0.3 m infrared heater, all-round use with tripod



Infrared heater with immediate effect.
With 0.3 m power cable and tripod, making it suitable for use almost anywhere. Power 2000 W, 230 V, N AC.
Set consists of: 94.4571 + 94.4763

Art. No.	Price E excl. VAT
94.4780	333.00

Set: Terra Vita II 2.3 m infrared heater, all-round use with tripod



Infrared heater with immediate effect.
With 0.3 m power cable and tripod, making it suitable for use almost anywhere. Power 2000 W, 230 V, N AC.
Set consists of: 94.4572 + 94.4763

Art. No.	Price E excl. VAT
94.4781	353.00

Frost monitor FW 505

Art. No.	Price E excl. VAT
95.2373	34.00

Stable casing, compact construction, continuous thermostat control + 5 °C to + 45 °C.
Colour white. Power 500 W/230 V N AC. Weight 1.4 kg.
(PU 12)* Outer dimensions HWD 39 x 17.5 x 8.5 cm



Spot light LSW 1501

Art. No.	Price E excl. VAT
94.3123	165.00
Set of 12	
94.5279	1,815.00

Power 1500 W, protected against water spray (IP X4), aluminium casing, flush, horizontal wall installation, reflector can be pivoted up to 65°. Weight 2.4 kg. (packaging unit 6)*
Colour silver-metallic. Connection 230 V N AC.
Outer dimensions HWD 10 x 99 x 9 cm



Compact heater WS 1200

Art. No.	Price E excl. VAT
94.2825	42.00
Set of 12	
94.5186	462.00

Quarz heater with 3 switching stages 600/600/1200 W, horizontal wall mounting, device can be pivoted by 30° pull switch. Weight 1.6 kg. (PU 4)* colour silver-metallic.
Connection 230 V N AC.
Outer dimensions HWD 14 x 54 x 7.5 cm



Compact heater WS 1800

Art. No.	Price E excl. VAT
94.2826	48.00
Set of 12	
94.5311	528.00

Quarz heater with 3 switching stages 600/1200/1800 W, horizontal wall mounting, device can be pivoted by 30°, pull switch. Weight 1.6 kg. (PU 4)* colour silver-metallic.
Connection 230 V N AC.
Outer dimensions HWD 14 x 54 x 7.5 cm



Terrace heater TSS 2003

Art. No.	Price E excl. VAT
94.4019	240.00
Set of 12	
94.5282	2,640.00

3 switching stages 500/1000/2000 W, heater part on height-adjustable tripod, can be pivoted in centre. 3 m connection cable with plug. Tripod height 60 - 90 cm.
Weight 5.6 kg. (PU 4)* colour silver-metallic.
Outer dimensions HWD 7.5 x 86 x 7.5 cm



* Please observe: Surcharge if packaging unit is opened, or price advantage if more than one full packaging unit is ordered.

:: COLLAGEN UNITS

Skinfresh 4



Collagen compact unit for smoother, younger skin.

Power 60 W/230 V N AC /50 Hz.
Outer dimensions HWD 41 x 26 x 19 cm.



Art. No.	Price E excl. VAT
95.5369	199.00
Set of 6	
95.5374	1,393.00

Skinfresh Tancan 3000

Art. No.	Price E excl. VAT
95.4698	6,095.00


Collagen unit for full body application, separately switchable. For smoother, younger-looking skin.
Lamps 30 x 100 W collagen
Power approx. 3000 W/230 V N AC /50 Hz.
Fuse 1 x 16 A. Dimensions 230 x 110 x 110 cm.



Skinfresh 6



Collagen table unit for smoother, younger skin.
LC version (without timer) PZN: 9523136
Power approx. 160 W /230 V N AC /50 Hz.
Dimensions HWD 57 x 36 x 23 cm.



Art. No.	Price E excl. VAT
95.4682	295.00
Tripod for Skinfresh 6	
95.4791	79.00

Skinfresh Sunray 29/0

Art. No.	Price E excl. VAT
95.4726	5,095.00

Collagen unit for full body application, separately switchable. For smoother, younger-looking skin.
Lamps 29 x 100 W collagen
Power approx. 2900 W/230 V N AC /50 Hz.
Fuse 1 x 16 A.
Dimensions 102 x 102 x 200 cm.



Skinfresh HT 220



1 collagen high-pressure lamp 200 W in white.
Special collagen filter panel. 30 minute timer.
Carrying handle. Cable tunnel for mains cable.
Power 220 W/230 V N AC /50 Hz.
Outer dimensions HWD 46 x 25 x 15 cm.

Art. No.	Price E excl. VAT
95.5151	495.00

Skinfresh Sunsky 200 (ceiling unit)

Art. No.	Price E excl. VAT
95.5069	4,500.00


Minimum exhaust air quantity
Skinfresh Sunsky 200: 520 m³/h

The collagen sky for private use and for professional, well-visited Beauty and Wellness areas. The generous ceiling clearance conveys a feeling of openness and freedom to the customer. 4 x 200 Watt (Skinfresh Sunsky 200) control unit (e.g. Suntec S.28) required. Skinfresh Sunsky 200: Power 1000 W/230 V N AC/50 Hz.
Fuse 1 x 16 A. Colour RAL 9016 white.



You can find optional accessories for Skinfresh Sunsky such as a matching rattan lounger, time control, mounting bracket or attractive decoration variants on Page 28.


Skinfresh Atlantic 24/17



UV and collagen unit for full body application, separately switchable. For smoother, younger-looking skin. Select between collagen and tanning mode.
Top part 14 x 100 W UV + 11 x 100 W Collagen
Lower part 10 x 100 W UV + 6 x 100 W Collagen
Power approx. 2650 W/230 V N AC /50 Hz.
Fuse 1 x 16 A. Dimensions 93 x 89 x 216 cm.


Art. No.	Price E excl. VAT
95.4591	5,300.00
Dual body ventilator for Skinfresh Atlantic, colour White	
95.5153	260.00

Skinfresh Atlantic 24/0



Anti-aging collagen radiation unit for full body applications, lying unit for optimum all-round application for smoother, younger and fresher skin.
Top part 14 x 100 W Collagen
Bottom part 10 x 100 W Collagen
Power approx. 2650 W/230 V N AC /50 Hz.
Fuse 1 x 16 A
Dimensions 93 x 89 x 216 cm

Art. No.	Price E excl. VAT
95.4909	3,850.00
Dual body ventilator for Skinfresh Atlantic, colour White	
95.5153	260.00

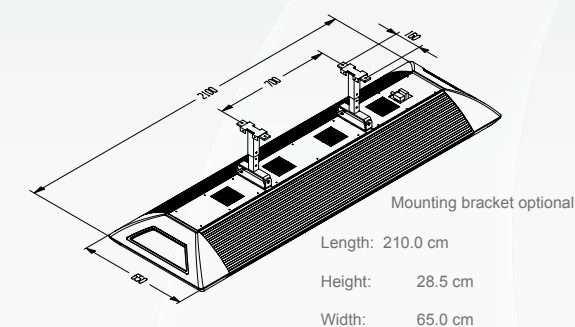


:: SOLARIUMS - PREMIUM LINE

Atlantic 24/0




24 reflector tubes.
Top part 14 x 100 W (200 cm/1.0%).
Bottom part 10 x 100 W (200 cm/1.0 %).
Plexiglas safety pane.
Standard unit colour black/white aluminium
Power 2650 W/230 V N AC / 50Hz. Fuse 1 x 16 A.



Art. No.	Price E excl. VAT
95.3141	3,300.00

Atlantic 24/1



24 reflector tubes.
1 400 W facial tanner, can be switched off.
Top part 10 x 100 W (200 cm/1.0 %) + 4 x 100 W (176 cm/1.0 %).
Bottom part 10 x 100 W (200 cm/1.0 %).
Plexiglas safety pane. Fan run-on.
Standard unit colour black/white aluminium
Power 3150 W/230 V N AC / 50Hz.
Fuse 1 x 16 A.



Art. No.	Price E excl. VAT
95.3144	3,600.00
Additional equipment At-lantic: Dual body ventilator, switchable, colour Silver	
95.2498D	260.00

Sunray 27/1




27 reflector tubes.
1 400 W facial tanner, can be switched off.
Top part 8 x 100 W (176 cm/1.0 %) + 5 x 80 W (150 cm/1.0 %).
Bottom part 14 x 100 W (176 cm/ 1.0 %).
Plexiglas safety panes. Fan run-on. Operating hours counter. Connection option for coin machine.
Power 3500 W/230 V N AC /50 Hz. Fuse 1 x 16 A.

Unit length: 200 cm
Tanning surface: 185 x 73 cm
Minimum exhaust air quantity: 1440 m³/h




Art. No.	Price E excl. VAT
Blue acrylic	
95.3174	5,200.00
White	
95.4137	5,095.00
Additional equipment Sunray: body ventilator	
95.2906	498.00



Select 34/3

Art. No.	Price E excl. VAT
Pearl light gray	
95.3303	6,150.00
Blue	
95.3313	6,150.00
Additional equipment Select: body ventilator, colour black	
95.2274	385.00

34 reflector tubes.
3 400 W facial tanner, can be switched off.
Top part 22 x 100 W (176 cm/1.0 %).
Bottom part 12 x 120 W (200 cm/1.0 %).
Plexiglas safety pane.
Fan run-on. Operating hours counter.
Connection option for coin machine.
Power 5800 W/400 V 3N AC/50Hz.
Fuse 3 x 16 A.



Unit length: 214 cm (without body ventilator)
220 cm (with body ventilator at foot end)
Tanning area: 194 x 72 cm
Minimum exhaust air quantity: 1440 m³/h


Sunsy 400/ Sunsky 800 (ceiling solarium)

Art. No.	Price E excl. VAT
Sunsy 400 RAL 9022 pearl light grey	
95.3853	4,560.00
Sunsy 400 RAL 9011 black	
95.4135	4,560.00
Sunsy 800 RAL 9022 pearl light grey	
95.3812	5,160.00
Sunsy 800 RAL 9011 black	
95.4381	5,160.00

Sunsy 400: Power 2000 W/230 V N AC.
Fuse 1 x 16 A.
Sunsy 800: Power 3900 W/400 V 3N AC.
Fuse 3 x 16 A.

Minimum exhaust air quantity Sunsky 400: 520 m³/h
Minimum exhaust air quantity Sunsky 800: 955 m³/h

The sun sky for private use and for professional, well-visited Wellness areas.
The generous tanning space conveys a feeling of openness and freedom to the customer.
Gentle tanning through optimised lamp arrangement.
4 x 400 W (Sunsy 400) with blue filter.
4 x 800 W (Sunsy 800) with clear glass filter.
Control unit (e.g. Suntec) required.

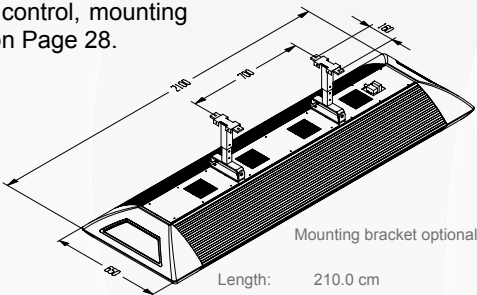


Mounting bracket optional.

:: SOLARIUMS - PREMIUM LINE

Tancan 3000



30 UV excellent reflector lamps à 100 W (1.0 %), Plexiglas safety pane. Adjustable body ventilation. Fan run-on. Connection option for coin machine. Power 3400 W/230 V N AC / 50Hz. Fuse 1 x 16 A.



Art. No.	Price E excl. VAT
95.4475	6,275.00

Tandome 120 W Basic



51 reflector tubes 120 W (200 cm/0.7 %). Plexiglas safety pane. Fan run-on. External control required. Exhaust air connection. Standard unit colour black. Power 7400 W/400 V. Fuse 3 x 16 A. Colour translucent green/blue



Art. No.	Price E excl. VAT
95.3437	7,700.00

Tandome II 120 Premium



54 reflector tubes 120 W (200 cm/ 0.7 %) Multifunction control with operating hour query, MP3 connection, aroma & breeze function. Plexiglas safety pane. Variable body ventilator. Fan run-on. Exhaust air connection. Translucent with circumferential decorative lighting. Power 7900 W/400 V. Fuse 3 x 16 A. Colour melon yellow RAL 1028.



Art. No.	Price E excl. VAT
95.4198	10,398.00

:: SOLARIUMS - BASIC LINE

perfekt 181

Art. No.	Price E excl. VAT
95.3571	2,650.00


18 UV excellent E tanning lamps, 1 intensive facial tanner 400 W, separate switching. Top part 6 x 100 W (176 cm) + 2 x 80 W (150 cm), Bottom part 10 x 100 W (176 cm). Plexiglas safety pane. Power 2650 W/230 V N AC / 50Hz. Fuse 1 x 16 A. Colour pure white RAL 9010.



perfekt 241

Art. No.	Price E excl. VAT
95.4841	2,900.00


24 UV excellent E tanning lamps, 1 intensive facial tanner 400 W, separate switching. Top part 8 x 100 W (176 cm) + 4 x 80 W (150 cm), Bottom part 12 x 100 W (176 cm). Plexiglas safety pane. Power 3300 W/230 V N AC / 50Hz. Fuse 1 x 16 A. Colour pure white RAL 9010.



excellent 241 R

Art. No.	Price E excl. VAT
95.3598	3,700.00



24 UV excellent ER reflector lamps, 1 intensive 400 W facial tanner with blue filter pane, separate switching. Top part 9 x 100 W (176 cm) + 3 x 80 W (150 cm), bottom part 12 x 100 W (176 cm). Plexiglas safety pane, fan run-on. Body ventilator, can be retrofitted for extra charge. Can take coins. Power 3300 W/230 V N AC / 50Hz. Fuse 1 x 16 A. Colour pure white RAL 9010.




excellent 323 R

Art. No.	Price E excl. VAT
95.3625	4,900.00
Additional equipment body ventilator, colour white	
95.3032	185.00

32 UV excellent ER tanning lamps, 3 intensive 400 W facial tanners with blue filter pane, separate switching. Top part 6 x 100 W (176 cm) + 10 x 80 W (150 cm), bottom part 16 x 100 W (176 cm). Plexiglas safety pane, fan run-on. Body ventilator, can be retrofitted for extra charge. Can take coins. Power 5100 W/400 V 3N AC / 50Hz. Fuse 3 x 16 A. Colour pure white RAL 9010.




Tancan 3000




Minimum exhaust air quantity: 4830 m³/h
Unit height approx. 2.30 m

Tandome



Tanning space: w=85 cm, h=203 cm
Total height: 230 cm
Representation without air conditioning.
Minimum cabin height 250 cm with straight exhaust air guidance.
Minimum exhaust air quantity: 4830 m³/h

Tandome II



Tanning space: w=93 cm, h=195 cm
Total height: 235 cm
Minimum cabin height: 250 cm.
Minimum exhaust air quantity: 4830 m³/h

:: FACIAL TANNER

Quattro



Facial tanner. 4 UV tanning lamps, 15 W each (2.0 %).
30 minute timer.
Power 75 W/230 V N AC / 50Hz. Colour white.
Weight 2.6 kg (packaging unit 4).
Outer dimensions HWD 34 x 24 x 19 cm.



Art. No.	Price E excl. VAT
95.2296	99.00
Set of 12	
95.5283	1,089.00

NT 363T



Unfolding facial tanner. 12 UV tanning lamps, 15 W each (2.0 %). Any opening angle of leaf doors for optimum tanning of sides of face. Adjustable and fixable inclination angle. with auto-stop system. Digital timer with auto-stop system. Safety switch. Power 200 W/230 V N AC / 50Hz. Weight 5.8 kg. Colour: white.
Outer dimensions HWD 47.5 x 26 x 21.5 cm (packaging unit 2)



Art. No.	Price E excl. VAT
95.5526	259.00

HT 420



1 UV halide high-pressure lamp 400 W (1.1 %).
Special clear filter pane. 30 minute timer.
Carrying handle. Cable tunnel for mains cable.
Power 420 W/230 V N AC / 50Hz.
Weight 4.5 kg (packaging unit 2).
Outer dimensions HWD 46 x 25 x 15 cm.



Art. No.	Price E excl. VAT
91.7479	430.00
Set of 12	
95.5285	4,730.00

:: ACCESSORIES

Suntec

Art. No.	Price E excl. VAT
95.3892	210.00

External control for all solariums,
30 or 60 minute timer



Token/coin machines € 2

Art. No.	Price E excl. VAT
Token meter	
95.2389	450.00
Tokens (PU 50 pcs)	
91.7489	44.00
€ 2 coin machine	
95.2390	450.00

Token machine:
For inserting tokens. Incl. 30 tokens.
Individual time setting 1 - 99 minutes.
Digital display. Automatic block for cooling fan.

Coin machine € 2:
€ 2 insert. Individual time setting 1 - 99 mins.
Digital display. Automatic block for cooling fan.



Shoulder cushion

Art. No.	Price E excl. VAT
2001.4746	18.00

For solariums from all series.
Material: PU foam.
Outer dimensions HWD 5 x 19.5 x 15.5 cm.



UV protective goggles

Art. No.	Price E excl. VAT
2000.0966	2.50

TÜV (German MOT) tested, with rubber band
(packaging unit 12).



Hygiene foil

Art. No.	Price E excl. VAT
91.7492	52.00

Hygiene foil 73 cm wide, 1000 m roll



Assembly and set-up service

Art. No.	Price E excl. VAT
Type 1	
99.9903	400.00
Type 2	
99.9904	600.00

Assembly and set-up service type 1,
Solariums/large units with AC 230 V,
within Germany

Assembly and set-up service type 2,
Solariums/large units with three-phase current 400 V,
within Germany



:: TANNING & COLLAGEN LAMPS, STARTERS/HEATERS

:: RADIATION UNITS YOU CAN FIND OUR COLLAGEN UNITS ON PAGES 38+39!

Tanning lamps

Lamp design (packaging unit 25)	Power	UVB:UVA	reflector	Article number	Length	Usage	Price € excl. VAT
excellent VSE Power	15 W	2.0 %	No	2000.3116	30 cm	NT 363 U, Quattro	7.50
excellent E	25 W	1.0 %	No	2000.3113	44 cm	NT 446 U	9.80
excellent packaging unit	80 W	1.3 %	No	2000.8566	150 cm		10.90
excellent packaging unit	100 W	1.3 %	No	2000.8770	176 cm	Perfekt	11.10
excellent ER	80 W	1.0 %	Yes	2000.8771	150 cm	Excellent; Sunray;	13.40
excellent ER	100 W	1.0 %	Yes	2000.8772	176 cm	Tancan; Excellent; Atlantic; Sunray; Select	13.60
excellent ER L	100 W	1.0 %	Yes	2001.2626	200 cm	Atlantic	17.90
Excellent R-L	120 W	0.7 %	Yes	2001.2513	200 cm	Select	18.50

High-pressure lamp (packaging unit 1)	Article number	Length	Diameter	Power	Usage	Price € excl. VAT
excellent HX - 400 R7S	2000.8812	106 mm	14 mm	400 W/230 V	Perfekt, Select, Atlantic, Excellent, Sunray	26.00
excellent HX - 300-500 E	2001.0624	102 mm	14 mm	300 - 500 W	Sunsky 400	41.00
excellent HX - 800-1000	2001.3535	102 mm	14 mm	800 - 1000 W	Sunsky 800	101.00
excellent HX - 400 D	2000.3111	125 mm	14 mm	400 W/230 V	HT 420	39.00

Collagen lamps

Lamp design (packaging unit 25)	Power	UVB:UVA	reflector	Article number	Length	Usage	Price € excl. VAT
Collagen	24 W	0%	No	2001.4511	44 cm	Skinfresh 6	16.50
Collagen T8	100 W	0%	No	2001.4526	200 cm	Skinfresh 24/17	21.00
Collagen	100 W	0%	No	2001.4609	200 cm	Skinfresh Atlantic 24/0	20.00
Collagen T12	100 W	0%	No	2001.4626	176 cm	Skinfresh Tancan 3000 Skinfresh Sunray 29/0	20.00

High-pressure lamp (packaging unit 1)	Mount	Article number	Power	Usage	Price € excl. VAT
Collagen	Wire ends	95.5428	HD-200W	Skinfresh HT 220	129.00
Collagen	1-sided base	95.5427	HD-200W	Skinfresh Sunsky 200	140.00

Starter

Starter (packaging unit 25)	Article number	for UV lamp power	Price € excl. VAT
Type BST 65	2000.8778	80 W	1.40
Type BST 100	2001.4610	100 W	1.70
Type BST 160	2001.4611	120 - 160 W	2.30

Beauty Skin

Art. No.	Price E excl. VAT
94.2452	235.00
Tripod for Beauty Skin	
91.7585	130.00

Beauty Skin is a highly effective process for cosmetic use on skin impurities.
UV-free. Power 100 W. Weight 4.5 kg.
PZN: 9523142
Outer dimensions HWD 41 x 26 x 19 cm
Voltage 230 V N AC / 50Hz. (packaging unit 2)



Accessories for Beauty Skin

	Art. No.	Price E excl. VAT
Blue spare lamp (400 - 450 nm)	2001.2677	12.00
Red spare lamp (580 - 630 nm)	2001.2676	12.00
Beauty Skin castor-mounted tripod	91.7485	130.00

WellLite

Art. No.	Price E excl. VAT
95.4108	135.00

Wellness light unit in white.
2 x 36 W irradiation lamps 10,000 lux, with carrying handle.
Upright/tabletop unit with wall mounting bracket.
Weight 3 kg. Outer dimensions HWD 57 x 43 x 14.5 cm
Voltage 230 V N AC / 50Hz. (packaging unit 6)



Kernmed 150 W Standard

Art. No.	Price E excl. VAT
91.7514	29.50
Spare lamp 150 W	
2000.4612	9.00

Infrared lamp with continuous inclination adjustment,
IR pressed glass reflector lamp 150 W (diameter 122 mm).
Weight 0.7 kg. (packaging unit 8)
Voltage 230 V N AC / 50Hz.



UV light comb

Art. No.	Price E excl. VAT
95.3030	369.00

The light comb is to be used for the hair area on the head.
Can also be used as a partial irradiation unit due to removable comb. Colour - silver

The set contains:
Robust case for safe storage, comb, timer and protective goggles. Power 11 W.
Voltage 230 V N AC / 50/60Hz. Weight 1.5 kg.
Aid No. 06.30.01.0001



:: MASSAGE

IRelax (infrared unit)



Variant 1:
Rotating and height-adjustable tripod IR heater. Mobile and flexible with the movable tripod. With mains switch and starter current limiter. The design of the tripod may vary. Weight approx.: Tripod 11.5 kg /heater 4.5 kg.

Variant 2
IRelax without tripod but with wall and ceiling mount.

Outer dimensions infrared heater 890 x 165 x 110 mm
Heated area approx. 1200 x 500 mm
Voltage 230 V N AC /50 Hz

Art. No.	Price E excl. VAT
Tripod variant 500 W	
94.4761	615.00
Tripod variant 750 W	
94.4762	715.00
Only tripod	
94.4843	150.00
Wall/ceiling variant 500 W	
94.5056	465.00
Wall/ceiling variant 750 W	
94.5057	564.00


Vibramat



Large area massage unit.
2 speed stages, storage case, with plastic hyperemization brush and cellular rubber shoe.
PZN: 9493122
Power 100 W. Weight 2.7 kg.
Voltage 230 V N AC / 50Hz.

Art. No.	Price E excl. VAT
91.7275	215.00
Set of 12	
95.5281	2,365.00

Vibramat massage attachments



	Art. No.	Price E excl. VAT
Cellular rubber shoe (200 g)	2000.7364	18.00
Studded cellular rubber shoe (200 g)	2000.7226	23.00
Plastic hyperemization brush (50 g)	2000.7365	10.00

Maspo-Super



2-stage switching and also a tapping massage switching stage, includes pocket with 6 application parts,
PZN: 9523113
Power 20 W. Weight 1.3 kg.

Voltage 230 V N AC / 50Hz.

Art. No.	Price E excl. VAT
91.7525	185.00
Set of 12	
95.5280	2,035.00

Maspo-Super massage attachments



	Art. No.	Price E excl. VAT
1 - rubber hedgehog	1352000	6.00
2 - rubber buffer	1352400	6.00
3 - hard panel	1357500	16.00
4 - sponge	1357400	17.00
5 - rubber bell	1352100	8.00
6 - nylon hedgehog	1352200	6.00
7 - massage cone	1353200	8.00

Massage cushion

Art. No.	Price E excl. VAT
95.4790	75.00

Power 24 W. Weight 3.1 kg.
Outer dimensions HWD 45 x 30 x 10 cm.
Voltage 230 V N AC / 50Hz.

The "cushion massage" is the most comfortable method of overcoming everyday complaints easily and pleasantly. After connection to the mains, the massage cushion is ready for use. 2 stages of massage intensity. Changeable massage direction. One mains adaptor and one vehicle adaptor, easy-clean plastic sleeve. Colour: black




MaspoRoll (Roller massage unit)

Art. No.	Price E excl. VAT
95.4328	3,000.00

Motor capacity 160 W, weight 70 kg.
Outer dimensions HWD 81 x 110 x 77 cm.
Voltage 230 V/50 Hz

Roller massage unit with 70 speed stages (34-49 rpm). Digital display and foil keyboard. Polished natural wood rollers. Stool and backrest for wall mounting included. Connection power 280 W.



Belt massager Topfit 5000 Bodyline

Art. No.	Price E excl. VAT
95.3776	1,880.00

Power 350/450 W. Weight 80 kg.
Outer dimensions HWD 130 x 115 x 75 cm.
Voltage 230 V N AC / 50Hz.

For commercial and private applications, with powerful 2-stage special motor. Continuous, gas pressure spring-supported height adjustment of massage head, large floor plate with resistant stainless steel handle tube for safe standing. Includes massage belt.



Belt massager Topfit 3000

Art. No.	Price E excl. VAT
91.9703	670.00

Power 350/450 W. Weight 28 kg.
Outer dimensions HWD 100-130 x 80 x 50 cm.
Voltage 230 V N AC / 50Hz.

For commercial and private applications, with powerful special motor. Continuous height adjustment, double-reinforced, large floor plate with PVC studded coating, with 2-stage rocker switch, massage belt included.



Topfit accessories

	Colour	Art. No.	Price E excl. VAT
Chest belt - length 154 cm (without tab).	White	91.7531	37.00
Reinforced chest belt - length 154 cm (without tab).	Blue	91.7880	43.00
Ball belt - length 154 cm (without tab).	Blue/white	95.1079	52.00
Reinforced ball belt - length 154 cm (without tab).	Blue/white	91.7881	59.00
Normal belt	Blue/white	91.7530	27.00



:: IMPORTANT NOTES

Delivery of the articles, including special equipment, shall take place exclusively according to our general business terms and conditions plus any freight and/or customs costs. Our supply and payment conditions apply. The price list is effective from January 1, 2013. It will lose its validity when a new price list is issued. All information is subject to errors and changes. Export to and operation in the USA or Canada are prohibited. In this case we shall not be held responsible. We must point out explicitly that, in case of non-compliance, high liability risks shall occur for the exporter and/or operator. The prices valid on the day of delivery shall be used for invoicing. Subject to technical and optical changes. Once this price list becomes effective, all previously dated price lists shall become invalid. We shall not be liable for printing errors.

For subsequent changes of already confirmed shipments, a handling fee of 100.00 € shall be charged.

For the preparation of customs papers in third countries, we charge a preparation fee of 20.00 € per order for EU customers.

When forwarding to third parties, we charge a handling fee of 5% for orders below a goods value of 300.00 €.

The work will be invoiced separately for customised special wiring.

- We invoice surcharges of min. 5.00 EUR respectively for:
- Minimum orders / minimum quantities below 50.00 EUR net goods value
 - Individual / package dispatch of sauna heaters (see possible deviating notes with sauna heaters)
 - Opened packaging units

Guarantee
The guarantee has been adopted according to the current legal regulations.

The packaging for all of our products is designed for the shipping of individually packed goods (pallet). At this point we would like to point out explicitly that our packaging is not suitable for individual shipments via parcel post. The sender is responsible for guaranteeing individual packaging. EOS Saunatechnik GmbH shall not be held liable for damages that occur due to improper packaging in individual shipments.

Manufacturer's warranty
We shall accept the legally-stipulated warranty and guarantee liability only if set-up, assembly and the operation of units including ventilation have been verifiably carried out professionally and according to the maintenance schedule.

- The warranty period begins with the date on the purchase receipt and is always limited to 12 months.
- Always include the associated purchase receipt when returning equipment.
- The warranty shall expire for units which have been modified without the manufacturer's explicit agreement.
- Defects caused by repairs, intervention through non-authorized persons or incorrect use are also not covered under the terms of warranty.
- In the event of a claim, please state the serial number as well as the article number and unit name with a comprehensive description of the fault.
- This warranty covers the remuneration of defective parts but does not cover defects due to normal wear and tear. Such wear parts include all lamps, starters, gas or oil pressure evaporators as well as Plexiglas panes, tubular heaters and sauna stones.
- During the warranty period, only original spare parts may be used.
- Service operations by external companies require written issue of orders from our Service Department.

Complaints about our products are to be submitted to the specialist trader responsible and are to be exclusively processed via them.

November 2012

EOS Saunatechnik GmbH
Adolf-Weiß-Str. 43, 35759 Driedorf-Mademühlen, Germany
Tel.: +49 (0)2775 82-0, Fax: +49 (0)2775 82-483, E-mail: info@eos-sauna.de

Service Center:
Tel.: +49 (0)2775 82-514, Fax: +49 (0)2775 82-455, E-mail: servicecenter@eos-sauna.de

www.eos-sauna.de
www.dr-kern.de

:: NOTES





EOS SAUNATECHNIK GmbH

Adolf-Weiß-Straße 43
35759 Driedorf-Madenmühlen
Germany

Telephone +49 (0)2775 82-0
Fax +49 (0)2775 82-431

info@eos-sauna.de
www.eos-sauna.de

This is the reason for generating the EPS
for the double page.